

ŵ



HIJSF CHAPON HTH

Inside every angler is a champion waiting to emerge. To set them free, you'll need a precision fishing tool with the power, performance and reliability to stand up to the rigors of tournament competition—and to do it reliably every time, whether you're simply fishing the lake with a buddy on a peaceful weekend or battling a legion of other anglers with their eyes on the same trophy. Either way, there's a NITRO[®] that will take you there. An unwavering attention to technical detail and a relentless pursuit of quality allows us to deliver championship boats to the finest anglers on the planet—and these same boats can belong to you. Each one is a high performance machine that gives their owner the upper hand. They are powerful syntheses of man and machine that push the boundaries of technical innovation. Because the champion inside you yearns to emerge—whether that's mounting the stage and hoisting a trophy or just being the champion your family deserves.



TAKE CONTROL & Parallel Eliteration of the second s

"I've been relying on NITRO for 30 years, and they've taken me to the top of the professional fishing world. Try one out—they can't be beat for performance, reliability and fishability."

KEVIN VANUAM NITRO® PRO ANGLER 14-TIME BASSMASTER CLASSIC® CHAMPION



NITIZE

A State of the second second

The NITRO® Z21 is designed with input from our leading pros, who between them hold one REDCREST championship, 11 Bassmaster Classic® titles and dozens of other first place finishes. It features an all-new 5" (12.7 cm) touchscreen switch panel w/one-touch boat controls—including the First Fish function, which fills and recirculates the livewell with one touch so you can get right back to fishing. Plus, the NITRO VORTEX TECHNOLOGY[™] (NVT[™]) hull provides a smooth, dry ride with optimal performance, and ample storage holds dozens of rods and tons of tackle.

1111









The NITRO[®] Z20 is a top-seller because its performance compares favorably with the Z21 while being more compact for probing docks and shallower water. The basis of the Z20 is the NVT[®] hull—a design that uses a series of parabolic curves for quicker holeshots, more lift while on plane and improved handling. The Z20 is optimized for tournament angling, with massive rod capacity in the two 8' (2.44 m) bow rod lockers and an enormous center tackle storage compartment with NITRO-exclusive TACKLE MANAGEMENT SYSTEM[®].

220

"My NITRO made winning the REDCREST Championship look easy—the reliability, performance and storage layout are second to none."

Inna

EUWIN EVERS NITRO® PRO ANGLER 2019 MLF REDCREST CHAMPION

STANDARD PACKAGE:

OPTIONAL MOTOR:

w/Mercury® 225 L Pro XS® FourStroke w/Torque Master & Custom Trailer

NITRO

111-260



Oversized lockable bow center storage locker w/TACKLE MANAGEMENT SYSTEM[™] & piston-assist lift

SPECIFICATIONS:

PPPP

Hull Length 20' 2''	Beam 7' 10"	Transom Height 22	Max. HP 250	Max. Person Capacity 4/575 lbs.	Fuel Capacity 50 gal.	Max. Weight Capacity 1,750 lbs.	Storage Length/Width 23' 8"/8' 6"
(6.15 m)	(2.16 m)	(55.88 cm)		(260.82 kg)	(189.27 L)	(793.79 kg)	(7.25 m/2.62 m)

Boats may be shown with optional equipment and accessories. Complete motor, feature and specification information available starting on page 46.



Professional Tournament Features Inclu

- Bow Humminbird® HELIX[™] 9 DI G3N & console HELIX 10 SI G3N fishfinders
 2 Minn Kota® 10' (3.05 m) Talon shallow-water anchors
 Minn Kota® Ultrex[®] 36V, 112-lb. (50.80 kg) , 45" (1.14 m) trolling motor w/Universal Sonar 2 & i-Pilot® Link[™]
 3-way Ethernet communication between fishfinders & trolling motor
 Power-adjust pneumatic lumbar support for driver's seat
 Hot Foot[™] throttle & Pro-Trim lever
 4-bank, 40-amp battery charger

1

2 NITRO-exclusive 19-gal. (71.92 L) aerated, recirculated GUARDIAN™ livewells w/pump-outs

NEW modular, aerodynamic console design w/more leg clearance & larger fishfinder surface

-5



WORLD CHAMPIONSHIP

At 19' 4" (5.89 m) and with 200HP standard, the NITRO® Z19 is fast enough for the most demanding tournament anglers and nimble enough to get into places where bigger, heavier boats can't. This is thanks in part to our exclusive NITRO VORTEX TECHNOLOGY" (NVT") hull, which improves holeshot, acceleration and overall performance. The Z-CORE" seating system with Force Flex suspension provides industry-leading comfort, and it's factory-rigged with a Mercury® outboard, Minn Kota® trolling motor, Lowrance® fishfinder and a custom-matched trailer.

A

NITRE

"The NITRO Z19 fits that 200-horse sweet spot just right—it's a very fast, extremely fishable boat that can take you right to the top of the leaderboard."

OTT DEFOE NITRO® PRO ANGLER 2019 BASSMASTER CLASSIC® CHAMPION



STANDARD PACKAGE: w/Mercury® 200 L Pro XS® FourStroke & Custom Trailer



0

NITRO

SPECIFICATIONS:

Hull Length 19' 4''	Beam 7' 10''	Transom Height 23	Max. HP 200	Max. Person Capacity 4/500 lbs.	Fuel Capacity 50 gal.	Max. Weight Capacity 1,375 lbs.	Storage Length/Width 22 7 7 8 6
(5.89 m)	(2.39 m)	(58.42 cm)		(226.80 kg)	(189.27 L)	(623.69 kg)	(6.88 m/2.59 m)

Boats may be shown with optional equipment and accessories. Complete motor, feature and specification information available starting on page 48.

Z-CORE[™] seating system w/Force Flex suspension & contoured, rotomolded frame for driver & passenger





Professional Tournament Features Ind

- Bow Humminbird® HELIX™ 8 DI G3N & console HELIX 8 SI G3N fishfinders
- Minn Kota[®] Ultrex[®]24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot[®] Link[™]
- 3-way Ethernet communication between fishfinders
- why European terminication between numbers
 & trolling motor
 T-H Marine G-Force Conservation livewell culling system
 Upgraded tandem-axle trailer w/boarding step, steel fender, custom 14" (35.56 cm) aluminum wheels & spare tire



Step to bow deck w/62-qt. (58.67 L) insulated cooler & removable trash receptacle



Oversized lockable bow center storage locker w/piston-lift assist

THE OFFICIAL BOAT OF







Zie

The NITRO® Z18 is America's best-selling fiberglass bass boat because it balances power and fishability in a ready-to-win package. It's built around our revolutionary NVT™ hull with RAPID PLANING SYSTEM™, giving you a smooth, soft and dry ride along with a brisk holeshot and precision handling. The massive bow deck is laid out with one purpose—catching fish. With a 24-volt Minn Kota® trolling motor standard and our ultra-comfortable Z-CORE™ driver, passenger and fishing seats, it really is a bass boat for everyone.

> "The Z18 is the most popular fiberglass bass boat in America because it provides the perfect balance of fishability, performance and ease of ownership."

TIMMY HORTON NITRO® PRO ANGLER HOST OF TV SHOW TIMMY HORTON OUTDOORS



2 aft 19-gal. (71.92 L) insulated, aerated GUARDIAN™ livewells w/digital timers & baffled rim for reduced slosh

Boats may be shown with optional equipment and accessories. Complete motor, feature and specification information available starting on page 50.

(249.48 kg)

(151.42 L)

(612.35 kg)

(5.69 m)

(2.39 m)

(57.15 cm)

(6.48 m/2.59 m)



Oversized lockable bow center storage locker w/piston-assist lid

Oversized, lockable bow port & starboard rod lockers w/lift assists for rods up to 8' (2.44 m)

DESIGNED TO PUT YOU Solution of the second s

NITRO

SPECIFIC	SPECIFICATIONS:						
Hull Length 17' 4'' (5.28 m)	Beam 7' 6'' (2.29 m)	Transom Height 20.5" (52.07 cm)	Max. HP 115	Max. Person Capacity 3/460 lbs. (208.65 kg)	Fuel Capacity 24 gal. (90.85 L)	Max. Weight Capacity 1,100 lbs. (498.95 kg)	Storage Length/Width 20' 9"/7' 11.5" (6.32 m/2.43 m)

Boats may be shown with optional equipment and accessories. Complete motor, feature and specification information available starting on page 52.

200

Driver & passenger bucket seats w/molded-in, gelcoated storage below each



The NITRO® Z17 is a compact, high-performance boat that's easy to own and even easier to fish. If you're thinking about stepping up from aluminum to fiberglass, you won't find a better, more value-packed choice. It shares many features with the larger boats in the Z Series, including the NITRO Vortex Technology™ hull, a large insulated cooler, lockable port and starboard bow rod lockers, a GUARD-IAN™ livewell, roomy tackle storage throughout and a handy passenger rod ramp.

STANDARD PACKAGE: w/Mercury® 115 ELPT Pro XS® FourStroke & Custom Trailer **OPTIONAL MOTOR:** • 115 ELPT Pro XS® FourStroke Command Thrust

Minn Kota® Edge® 12V, 55-Ib. (24.95 kg) thrust, 45" (1.14 m) shaft foot-control trolling motor

Custom-molded modular console w/2-tone gelcoat w/Lowrance HOOK² 4x fishfinder



Boats may be shown with optional equipment and accessories. Complete motor, feature and specification information available starting on page 53.

Add another facet of fun to your family's on-the-water time with the NITRO® Z19 Sport! With a protective walk-thru windshield, interior LED lighting, 16-gallon (60.57 L) livewell, removable ski tow pylon, Lowrance® fishfinder, aft swim platforms, and roomy storage throughout, it's got something for everyone in the family from the giggling tuber to the crappie angler. And with 200 max horsepower capacity, it's got the power to handle tournament competition, too.

Mercury® 150 L Pro XS® FourStroke & Custom Trailer

////////// • 150 L FourStroke • 200 L Pro XS[®] FourStroke



Aft swim platforms w/starboard boarding ladder & removable ski tow pylon



ZVZI

Built to give you the tools to compete in Great Lakes conditions, the ZV21 can do just about anything. New for 2020, it features a 5" (12.7 cm) touchscreen with one-touch command of boat controls—including the innovative First Fish function, which fills and recirculates the livewell with one touch. A handy key fob controls many of the same functions. And for the sprint back to shore, you'll be powered by up to 400 horses leading the charge. So when it comes to the biggest, baddest walleye lakes of the north, choose the ZV21.

MERCURY

"The ZV21 blows the competition out of the water when you consider every-thing—performance, fishability, safety and value. It's kept me at the top of my walleye game for years."

Leith lac

KEITH KAVAJECZ NITRO[®] PRO ANGLER CO-HOST OF TV SHOW THE NEXT BITE

00

R R R R R R

STANDARD PACKAGE w/Mercury[®] 250 XL Verado[®] Pro FourStroke & Custom Trailer

IPTINNAL I • 300 XL Verado® Pro FourStroke • 350 XL Verado® • 350 XL Verado® • 400 XL Verado®

NITRO

SPECIFIC	ATIONS:							
Hull Length 21' 7 "	^{Beam} 8' 4"	Transom Height 28	Max. HP 400	Max. Person Capacity 6/1,200 lbs.	Fuel Capacity 64 gal.	Max. Weight Capacity 2,500 lbs.	Storage Length/Width 24' 7"/8' 6"	
(6.58 m)	(2.54 m)	(71.12 cm)		(544.31 kg)	(242.27 L)	(1,133.98 kg)	(7.49 m/2.59 m)	




NEW touchscreen switch panel w/1-touch boat controls including First Fish, Nite Mode, master power, trim, lighting, bilge, livewells & more




Professional Tournament Features II

- Bow Humminbird[®] HELIX[™] 9 DI G3N & console HELIX 10 SI G3N fishfinders
 NEW Minn Kota[®] Ulterra[™] 36V, 112-lb. (50.80 kg) thrust, 72[#] (1.83 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot[®] Link[™]
 Mercury[®] 9.9 remote ProKicker trolling outboard
 3-way Ethernet communication between fishfinders & trolling motor
 Walk-thru windshield (or optional plexiglass windscreens)
- windscreens)
- 5 batteries & 3 chargers for reliable, consistent power



3-level center rod locker for rods up to 8' (2.44 m) w/tapered rod tubes to protect rod tips



Aft 26-gal. (98.42 L) GUARDIAN™, anti-slosh livewell & bow 5.5-gal. (20.82 L) baitwell w/bucket

SUIT-SPECIES SIGES SIGES SIGES

"The new NITRO ZV20 checks all the boxes for a tournament walleye angler like me—plus adds some special features for the whole family."

NITROZZO

the Farm

CHASE PARSONS NITRO[®] PRO ANGLER CO-HOST OF TV SHOW *THE NEXT BITE*

ALL-NEW FOR 2020

The NITRO® ZV20 is a formidable 300-horsepower-class Deep V fishing machine with the brute strength and fishability you need to conquer big water. New for 2020, it features 5" (12.7 cm) touchscreen command of boat controls—including the innovative new First Fish function, which fills and recirculates the livewell with one touch. A handy key fob controls many of the same functions. Built with crucial input from our walleye pros, the ZV20 is designed to find and catch walleye, but it pulls in some great family features as well.



V PACKAGE. w/Mercury® 225 XL Pro XS® FourStroke w/DTS & Custom Trailer

IPTIONAL MOTORS: • 250 XL Pro XS[®] FourStroke w/DTS • 300 XL Pro XS[®] FourStroke w/DTS

SPECIFICA	TIONS:							
Hull Length 20' 2'' (6.15 m)	Beam 8' 4'' (2.56 m)	Transom Height 26" (66.04 cm)	Max. HP 300	Max. Person Capacity 6/1,100 lbs. (498.95 kg)	Fuel Capacity 55 gal. (208.20 L)	Max. Weight Capacity 2,200 lbs. (997.90 kg)	Storage Length/Width 24' 1''/8' 6'' (7.34 m/2.59 m)	

New on the second

man B

Attwood[®] Centric X folding molded fishing seat w/hydraulic pedestal

Boats may be shown with optional equipment and accessories. Complete motor, feature and specification information available starting on page 56.



Professional Tournament Features Include:

- Bow Humminbird® HELIX[™] 9 DI G3N & console HELIX 10 SI G3N fishfinders
 NEW Minn Kota® Ulterra[™] 36V, 112-lb. (50.80 kg) thrust, 72" (1.83 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot® Link[™]
 Mercury[®] 9.9 remote ProKicker trolling outboard
 3-way Ethernet communication between fishfinders & trolling motor
 Walk-thru windshield (or optional plexiglass windscreens)

- windscreens) 5 batteries & 3 chargers for reliable, consistent power



NEW touchscreen switch panel w/1-touch boat controls including First Fish, Nite Mode, master power, trim, lighting, bilge, livewells & more



Deep V NVT[™] performance hull w/RAPID PLANING SYSTEM™ (RPS™) transom

ALL-WATER HASHING OF A STATE OF A

The ZV19 is the big-water beast we've been waiting for—it's an ideal boat for diehard northern anglers and families, too!

IGNITRO

0 0

Day Parson

1111111

GARY PARSUNS NITRO PRO ANGLER CO-HOST OF TV SHOW *THE NEXT BITE* ZVIS

The NITRO® ZV19 is a hardcore, overbuilt fishing machine with a maximum 225HP capacity, created with input from the world's top walleye anglers. The deep, comfortable interior keeps fearless anglers secure in rough weather and families safe when cruising. The aggressive Deep V hull slices through the chop on big lakes with smooth agility, and its wide beam provides plenty of stability for six anglers to move around the deck with confidence. It sports a list of fishing features that will please the pike, muskie, bass or walleye angler.

ITRO.COM/ 3



ARKARF-

w/Mercury® 150 XL Pro XS® FourStroke & Custom Trailer

IPTUNAL MUTURS:

• 200 XL FourStroke w/DTS • 225 XL Pro XS® FourStroke w/DTS

.....

(2.59 m)

(63.50 cm)

(5.77 m)

Boats may be shown with optional equipment and accessories. Complete motor, feature and specification information available starting on page 58.

(476.27 kg)

(170.34 L)

(907.18 kg)

(6.88 m/2.59 m)



NITROZ

3-level center rod locker w/organizers for rods up to 8' (2.44 m) plus passenger rod ramp



Professional Tournament Features Include

- Bow Humminbird[®] HELIX[™] 9 DI G3N & console HELIX 10 SI G3N fishfinders
 Minn Kota[®] Ulterra[™] 36V, 112-lb. (50.80 kg) thrust, Toriki and the state of t
- 72" (1.83 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot® Link™
 3-way Ethernet communication between fishfinders
- & trolling motor
 Walk-thru windshield (or optional plexiglass windscreens)
 KICKER[®] KMC1 Bluetooth[®]-capable stereo system



(ERCUR)

26-gal. (98.42 L) aft NITRO®-exclusive GUARDIAN™ livewell & 5.5-gal. (20.82 L) bow baitwell w/bucket



NEW Attwood[®] Centric X driver, passenger, fishing & bike seats w/shock-dampening core

AREADING FAMILY ASSOCIATE OF THE SECOND

SPORT

MITRO

13 17 22



The NITRO® ZV19 Sport is a dry-riding, safe and secure multi-species fishing and fun machine with max outboard power of 225HP. Two folding jump seats integrated into the aft deck and a stowable ski tow pylon provide fun for all, plus the deep, comfortable interior keeps tournament anglers secure in rough weather and families safe when cruising. Combined with the durability and reliability NITRO is known for, it's the boat of choice for lake-loving families.

MERCURY



w/Mercury[®] 150 XL Pro XS[®] FourStroke & Custom Trailer

• 200 XL FourStroke w/DTS • 225 XL Pro XS® FourStroke w/DTS

NITROZ






PRD

i Iournament Features Includ

- Bow Humminbird[®] HELIX[™] 9 DI G3N & console HELIX 10 SI G3N fishfinders
 NEW Minn Kota[®] Ulterra[™] 36V, 112-Ib. (50.80 kg) thrust, 72[™] (1.83 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot[®] Link[™]
 3-way Ethernet communication between fishfinders
- & trolling motor
- Bimini top

CUR

- Walk-thru windshield (or optional plexiglass windscreens)
 Factory-applied keel protector
 KICKER[®] KMC1 Bluetooth[®]-capable stereo system



Stowable ski tow pylon & 2 jump seats in aft deck



Port & starboard consoles w/2-tone gelcoat scheme (optional walk-thru windshield shown)

CUSTOM-MATCHED TRALEBS UNMATCHED QUALITY OF CONSTRUCTION

Every NITRO® trailer is built from heavy-duty steel tubing protected with our exclusive GALVASHIELD® Impact corrosion and chip protection—a thick, baked on powder coat finish that shields your trailer from the road and the water. This results in an extremely durable finish for maximum longevity through many trips to the lake, covered by the industry-leading warranty protection (3 years) against failure due to corrosion.

COLD-FORMED STEEL FOR EXTRA STRENGTH GALVANIZED (ZINC COATED) INSIDE & OUT

CONVERSION COAT FOR SUPERIOR ADHESION

GALVASHIELD IMPACT POWDER-COAT FINISH CHIP PROTECTION Other features include radial tires, an outboard motor support, safety winch strap on the heavy-duty

winch, swing-away tongue, low-maintenance hubs, safety cables, pivoting tongue jack and more. So, when you're ready to leave home and head to the water, your NITRO boat package is too!





 $\mathsf{GALVASHIELD}\ \mathsf{Impact}\ \mathsf{powder-coat}\ \mathsf{finish}\ \mathsf{for}\ \mathsf{improved}\ \mathsf{corrosion}\ \&\ \mathsf{chip}\ \mathsf{protection}$



Submersible, angled LED backup lights for long life & improved visibility

CUSTOM WHEELS

Select models are available with 18" (45.72 cm) custom matte Black aluminum alloy or Silver wheel upgrade with Hercules RAPTIS R-T5 tires. Fiberglass fenders are required for wheel upgrades.



NO TOUCH VORTEX HUBS W/ 6-YEAR, 100,000-MILE WARRANTY

All NITRO® trailers come with our No Touch Vortex hub lubrication system, so you no longer need to re-grease or inspect your hubs! These hubs feature a lithium complex fortified with rust and oxidation inhibitors, highpressure additives and great water resistance. They are also covered by a 100,000-mile or 6-year warranty! Completely sealed lubrication reservoir permits maximum lubrication

Easily accessible internal lubrication port fitting

Threaded cap for twist on/ off removal, should the need arise due to an accident Internal lubrication channel allows for maximum flushing of the existing lubricant while flushing the system with new lubricant, when the time comes to change grease



Triple-lip, spring-loaded seal provides improved sealing over single- & double-lip seals


SELECT YOUR


Z SERIES PREMIUM 3-COLOR COMBOS* STANDARD ON: Z18, Z19, Z20 & Z21. MORE OPTIONS AVAILABLE AT NITRO.COM.


Z SERIES ELITE 4-COLOR COMBOS OPTIONAL ON: Z18, Z19, Z20 & Z21. MORE OPTIONS AVAILABLE AT NITRO.COM.

NITRO[®] gelcoat is hand-applied in multiple layers at precise thicknesses by skilled technicians, and the result is a lustrous, highly durable finish that will dazzle onlookers—and last for a lifetime. Chose from a large range of custom colors to make your boat stand out at the lake. Configurations include

popular Premium 3-Color, Elite 4-Color and fully customized colors. Literally hundreds of combinations are possible, and our color selector tool online at NITRO.COM will let you see a preview of what your new boat will look like!

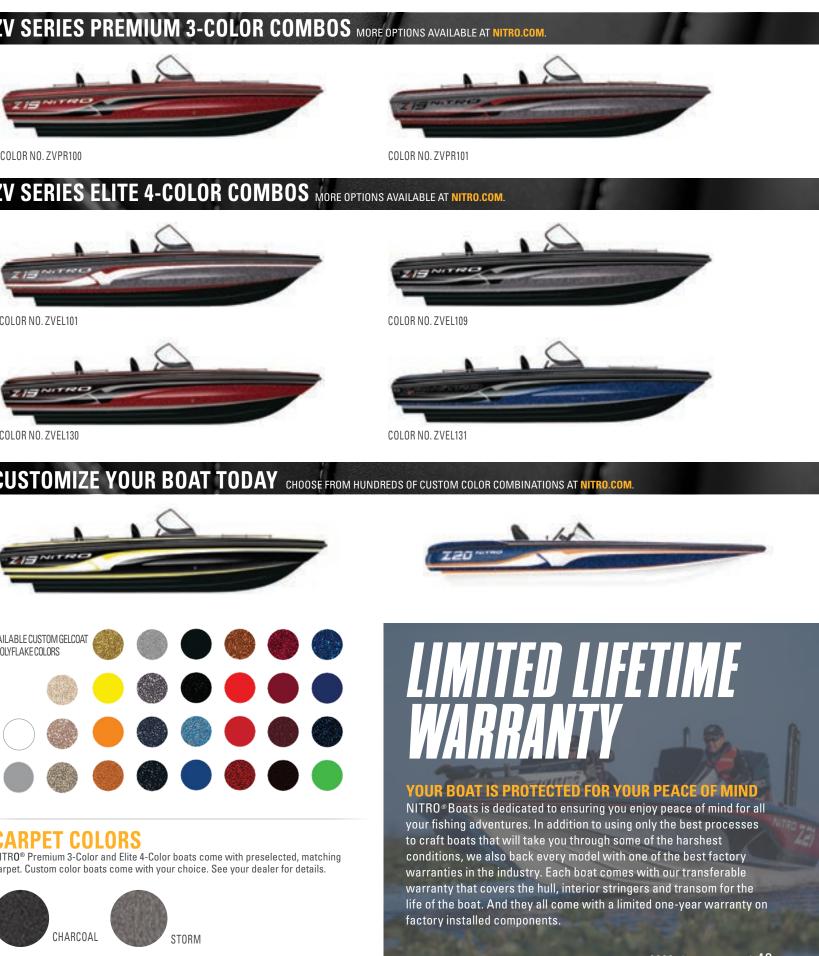

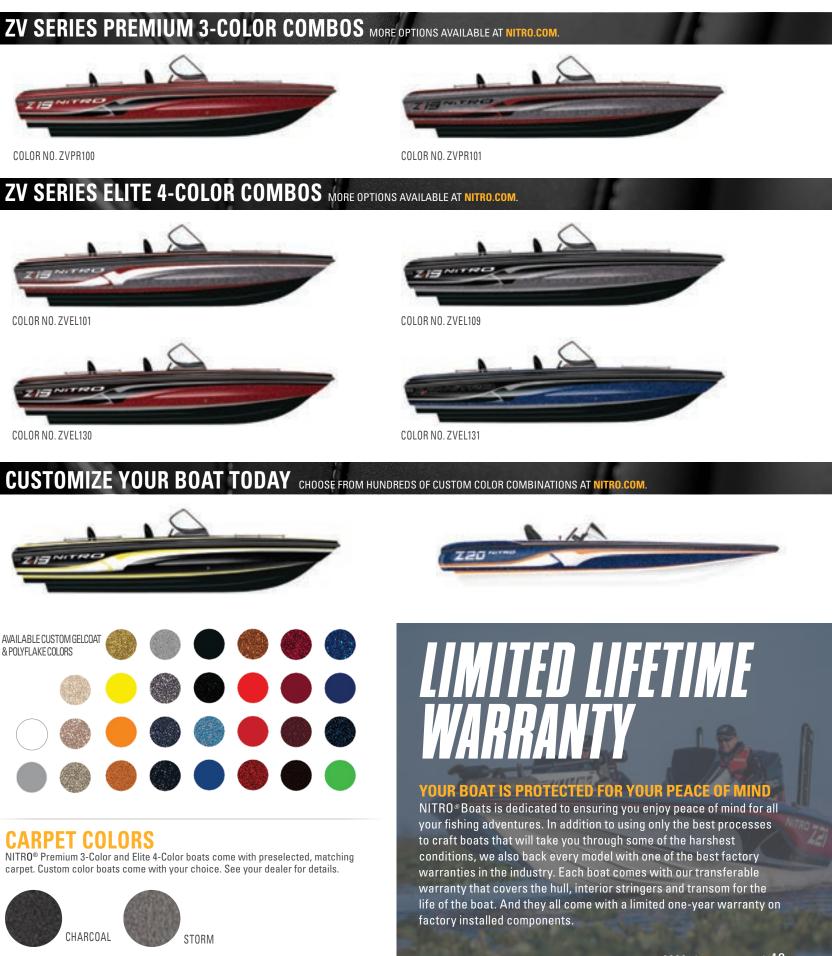

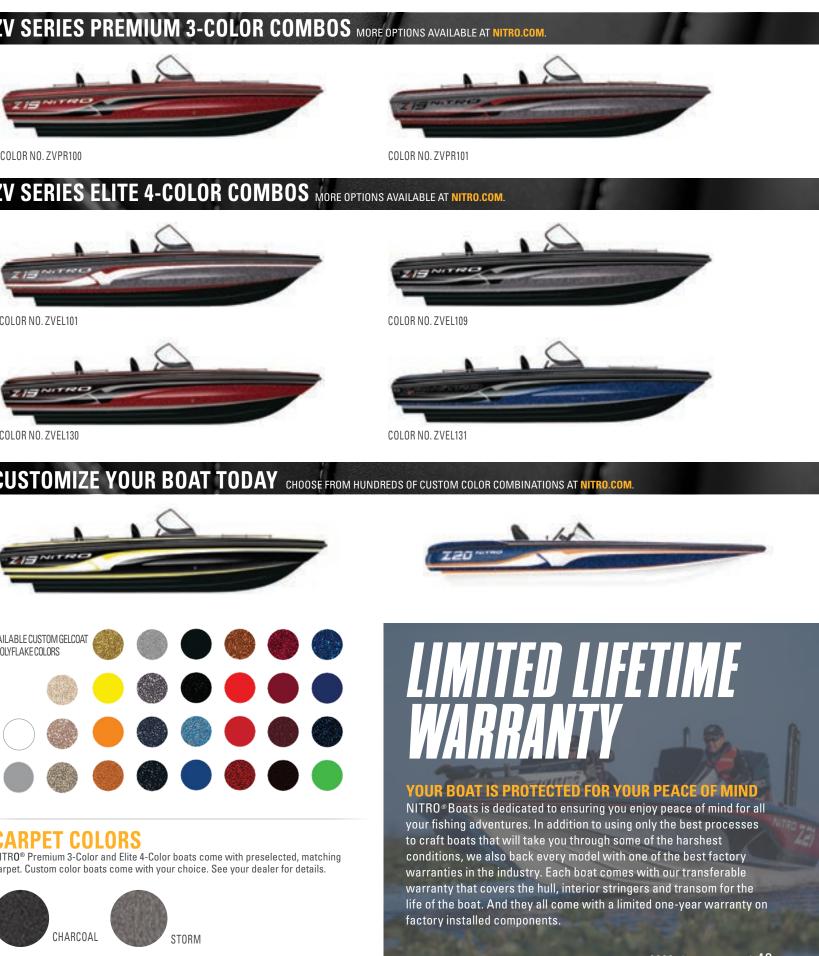



COLOR NO. EL21

COLOR NO. PR10

COLOR NO. PR111



COLOR NO. EL32



COLOR NO. EL133



*SEE 217 COLOR OPTIONS AT NITRO.COM

COLOR NO. EL22

COLOR NO. PR104

COLOR NO. PR113



COLOR NO. EL119





COLOR NO. EL134

Z SPORT COLORS MORE OPTIONS AVAILABLE AT NITRO.COM.



COLOR NO. SP11



CARPET COLORS



COLOR NO. SP19

ZZI STANDARD FEATURES & OP) Visit NITRO.COM to view more photos, see a complete list of motors, options, color combinations & features.

MOTOR OPTIONS

250 L Pro XS® FourStroke w/Torque Master

300 L Pro XS® FourStroke w/Torque Master

- Below-console RAM[®] X-Grip[®] phone holder & 12V outlet

45-sq.-ft., (4.2-sq.-m) anti-fatigue, padded bow deck for comfort

Folding fishing seat w/composite frame & hydraulic pedestal

rotomolded frame for driver & passenger seats

Bow port & starboard rod hold-down straps

Bow center magnetic under-lid lure organizer

trash receptacle & snap-in sandwich tray

Port below-console pull-out storage drawer

Footrest w/non-skid mat under console(s)

Designated net storage behind seating

Z-CORE[™] seating system w/Force Flex suspension & contoured.

Adjustable sliding driver & passenger seats w/removable center

Molded-in drainage channels around bow storage compartments

Tapered rod tubes in port rod locker to protect rod tips

- Oversized lockable bow center storage locker w/TACKLE

2 large, lockable bow center storage lockers w/lift assists

Partner rod ramp w/rod handle organizer & hold-down strap

2 lift-out, molded aft storage boxes that will each accept seven

Molded utility rigging compartment for easy access to batteries

Step to bow deck w/86-qt. (81.39 L) insulated cooler, removable

Oversized, lockable bow port & starboard rod lockers w/lift assists

MERCURY® MOTOR

HULL LENGTH 21'2'' (6.45 m)	BEAM 7' 11'' (2.41 m)	TRANSOM HEIGHT 22.5 " (57.15 cm)	мах. нр 300
MAX. PERSON CAPACITY	FUEL CAPACITY	MAX. WEIGHT CAPACITY	STORAGE LENGTH 24' 4'' (7.42 m)
4/825 Ibs. (374.21 kg)	55 gal. (208.20 l)	1,800 Ibs. (816.47 kg)	

SPECIFICATIONS

Bottom width	6' 2" (1.88 m)
Depth inside	18.5" (46.99 cm)
Deadrise	16 degrees
Draft	16" (40.64 cm)
Average weight	2,150 lbs. (975.22 kg)
Average package weight	4,050 lbs. (1,837.05 kg)
Package width	8' 6" (2.59 m)

STANDARD FEATURES

COMFORT, CONVENIENCE & PEACE OF MIND

NMMA[®] certified

- Flotation meets or exceeds NMMA® & U.S.C.G. requirements
- EPA-compliant fuel system
- Anti-fatigue, padded comfort bow deck
- Non-skid mats bow & stern Spare prop holder
- 5 drink holders
- 4 stainless steel pull-up cleats
- Integrated fold-down stainless steel reboarding ladder, angled for
- allowing optional shallow-water anchor
- 4 grab handles (1 at each seat)
- Built-in tournament ruler & holder
- Fire extinguisher, horn & paddle

LIVEWELL SYSTEMS

- 2 aft 19-gal. (71.92 L) insulated GUARDIAN™ livewells w/digital timers
- 750 GPH (2,839.06 LPH) livewell recirculation/pump-out system
- 500 GPH (1,892.71 LPH) aerator/fill pump - Oxygen generator in each livewell
- Dual remote drain controls
- Rotomolded w/rounded corners

TROLLING MOTOR

- Minn Kota® Maxxum® 24V, 80-lb. (36.29 kg) thrust, 42" (1.07 m)
- shaft, foot-control trolling motor
- Trolling motor pedal recess

CONSOLE

off & trim

free livewell prep

Dash light dimmer

LED courtesv light

Hydraulic steering w/tilt

Removable acrylic, tinted windscreen

Ready to accept optional removable port console

NEW modular, aerodynamic console design w/expanded leg clearance & larger fishfinder surface

NEW key fob remote w/First Fish, Nite Mode, master power on/

First Fish feature fills & recirculates livewell w/1 touch for stress-

Veethree® multifunction instrumentation w/speedometer/fuel

gauge, tach/trim gauge, voltmeter gauge & water pressure gauge

Insulated aluminum lids w/welded corners Lowrance® Elite-7 Ti² Combo flush-mounted fishfinder w/GPS **NEW** touchscreen switch panel w/1-touch boat controls including

Boat may be shown w/optional equipment. Motors, specs & features subject to change w/out notice.

- 24-oz. (.68 kg) plush, marine-grade cut pile carpet on deck & floor Stainless steel lockable latches First Fish, Nite Mode, master power, trim, lighting, bilge, livewells

& pumps & easy cleanup

PERFORMANCE

3700 tackle trays

16° variable deadrise hull

INTERIOR

& mobility

seat cushion

Bike seat w/hydraulic pedestal

for rods up to 8' (2.44 m)

MANAGEMENT SYSTEM[™]

- RAPID PLANING SYSTEM[™] (RPS[™]) for quicker holeshots & max

- Lift-out tool/rope storage tray in rigging compartment

- 12" (30.48 cm) adjustable jack plate
- Rigging tube for organized wiring & abrasion resistance Stainless steel propeller

CONSTRUCTION & EXTERIOR

100% composite deck core w/superior thermal stability & strengthto-weight ratio

- Deck & hull chemically bonded & mechanically fastened w/stainless steel fasteners every 2" (5.08 cm)
- Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom
- Low-profile gunnels to maximize deck size & for easier casting

ELECTRICAL

- Bow panel w/trolling motor receptacle, anchor/light switch, trim
- switch & capability to flush mount 10" (25.4 cm) fishfinder
- 1,600 GPH (6,056.66 LPH) bilge pump
- Automatic bilge
- LED console courtesy light
- Manual LED-lighted bow gear storage Automatic LED-lighted port & starboard bow rod storage
- Automotive-style labeled fuse panel w/cover
- Interstate[®] cranking battery
- 2 heavy-duty Interstate® trolling batteries
- 3-bank, 30-amp onboard battery charger w/exterior receptacle
- 6-gauge trolling motor wiring w/50-amp circuit breaker
- E-Start emergency jump start system
- Master power switch
- Ventilation fan system in bow storage
- Waterproof Deutsch plugin gauge connectors
- Water/abrasion-resistant connectors

TRAILER

- Custom-fit, tandem-axle NITRO® trailer powder-coated w/GALVASHIELD® Impact corrosion & chip protection
- 7-pin connector
- 14" (35.56 cm) custom aluminum wheels w/radial tires
- NEW surge disc brakes on both axles No Touch Vortex hub lubrication system w/6-year, 100,000-mile
- (1,609.34 km) limited warranty Spare tire carrier w/matching spare
- All-welded rectangular GALVASHIELD® frame
- Space-saving swing-away tongue to reduce storage length
- 1,600-lb. (725.75 kg) swing-up locking jack w/swivel wheel
- Heavy-duty winch w/nylon strap & bow safety strap
- Integrated winch stand step w/safety handle for easier boarding/
- reboarding at bow while boat is on trailer
- Outboard motor support to reduce hull & transom stress
- Fiberglass fender design w/integrated back-up lights
- Carpeted bunks & fender boards to protect hull
- Submersible LED lights Safety cables

ZZIELITELX

- (w/Elite, some standard features or options may not be available)
- Z-TOUCH[™] Command Center w/digital control of boat functions
- Bow Lowrance® HDS LIVE 12 gimbal-mounted fishfinder w/downscan transducer on trolling motor
- Console Lowrance® HDS LIVE 16 flush-mounted fishfinder w/HD transducer (2D puck in hull at transom)
- 2 Power-Pole® 8' (2.44 m) Blade Edition shallow-water anchors
- Minn Kota® Ultrex® 36V, 112-lb. (50.80 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®
- NMEĂ® Ethernet networking between fishfinders & trolling motor
- Front-access console storage w/removable tray for wiring access
- Power-adjust pneumatic lumbar support for driver's seat T-H Marine G-Force Conservation livewell culling system
- Factory-applied keel protector - 2 automatic bilge pumps
- 2 oxygen generators
- Hot Foot™ throttle & Pro-Trim lever
- 4-hank 40-amp hattery charger
- 1 extra trolling battery
- Retractable transom trailer tie downs

(bracket mounted, dealer installed)

Factory-applied keel protector

Hot Foot™ throttle & Pro-Trim lever

Retractable transom trailer tie downs

- Lowrance® Elite-7 Ti² (flush mounted)

- Lowrance[®] Elite-7 Ti² (gimbal mounted)

Lowrance[®] Elite-7 Ti² (RAM[®] mounted)

Lowrance® Elite-9 Ti² (flush mounted)

Lowrance[®] Elite-9 Ti² (gimbal mounted)

- Lowrance[®] Elite-9 Ti² (RAM[®] mounted)

Lowrance[®] Elite-12 Ti² (flush mounted)

- Lowrance[®] Elite-12 Ti² (gimbal mounted)

Lowrance[®] Elite-12 Ti² (RAM[®] mounted)

Lowrance® HDS LIVE 7 w/StructureScan® (flush mounted)

Lowrance® HDS LIVE 7 w/StructureScan® (gimbal mounted)

Lowrance® HDS LIVE 7 w/StructureScan® (RAM® mounted)

Lowrance[®] HDS LIVE 9 w/StructureScan[®] (gimbal mounted)

Lowrance[®] HDS LIVE 9 w/StructureScan[®] (RAM[®] mounted)

- Lowrance[®] HDS LIVE 12 w/StructureScan[®] (gimbal mounted)

Lowrance® HDS LIVE 12 w/StructureScan® (RAM® mounted)

Add LiveSight real-time 3D sonar to Lowrance® fishfinder

Humminbird[®] HELIX[™] 7 SI G3N (flush mounted)

Humminbird[®] HELIX[™] 7 SI G3N (gimbal mounted)

Humminbird[®] HELIX[™] 7 SI G3N (RAM[®] mounted)

Humminbird® HELIX™ 8 SI G3N w/GPS (flush mounted)

Humminbird[®] HELIX[™] 8 SI G3N w/GPS (gimbal mounted)

- Humminbird® HELIX[™] 8 SI G3N w/GPS (RAM® mounted)

Humminbird[®] HELIX[™] 9 SI G3N w/GPS (gimbal mounted)

- Humminbird[®] HELIX[™] 9 SI G3N w/GPS (RAM[®] mounted)

Humminbird® HELIX™ 10 SI G3N w/GPS (gimbal mounted)

Humminbird[®] HELIX[™] 10 SI G3N w/GPS (RAM[®] mounted)

Humminbird® HELIX™ 12 SI G3N w/GPS (gimbal mounted)

- Humminbird® HELIX™ 12 SI G3N w/GPS (RAM® mounted)

- Humminbird[®] SOLIX[™] 10 SI G2 (flush mounted)

Humminbird[®] SOLIX[™] 10 SI G2 (gimbal mounted)
 Humminbird[®] SOLIX[™] 10 SI G2 (RAM[®] mounted)

Humminbird[®] SOLIX[™] 12 SI G2 (gimbal mounted)

Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted)

Garmin[®] ECHOMAP[™] 93sv chartplotter (flush mounted)

Garmin[®] ECHOMAP[™] 93sv chartplotter (gimbal mounted)

Garmin® ECHOMAP[™] 93sv chartplotter (RAM® mounted)

Garmin[®] GPSMAP[®] 7607 chartplotter (gimbal mounted)

Garmin® GPSMAP® 7607 chartplotter (RAM® mounted)

Garmin® GPSMAP® 7608 chartplotter (gimbal mounted)

Garmin[®] GPSMAP[®] 7608 chartplotter (flush mounted)

Garmin® GPSMAP® 7607 chartplotter (flush mounted)

Lowrance[®] HDS LIVE 9 w/StructureScan[®] (flush mounted

- 4-bank, 40-amp battery charger

- 2 automatic bilge pumps

1 extra trolling battery

BOW FISHFINDER

OPTIONS

trolling motor w/Universal Sonar 2 & i-Pilot[®] Link[™]

Power-adjust pneumatic lumbar support for driver's seat

T-H Marine G-Force Conservation livewell culling system

ZZIPRO

- (w/Pro, some standard features or options may not be available)
- NEW bow Humminbird® SOLIX™ 10 DI G2 gimbal-mount fishfinder
- NEW console Humminbird[®] SOLIX[™] 12 SI G2 flush-mount fishfinder 2 Minn Kota® 10' (3.05 m) Talon shallow-water anchors—Black

Minn Kota® Ultrex® 36V, 112-lb. (50.80 kg) thrust, 45" (1.14 m) shaft

3-way Ethernet communication between fishfinders & trolling motor

- Lowrance[®] Elite-12 Ti² (flush mounted) Lowrance® Elite-12 Ti² (RAM® mounted) - Lowrance[®] Elite-12 Ti² (uninstalled) - Lowrance® HDS LIVE 7 w/StructureScan® (flush mounted) - Lowrance[®] HDS LIVE 7 w/StructureScan[®] (RAM[®] mounted) Lowrance[®] HDS LIVE 7 w/StructureScan[®] (uninstalled) Lowrance[®] HDS LIVE 9 w/StructureScan[®] (flush mounted) Lowrance[®] HDS LIVE 9 w/StructureScan[®] (RAM[®] mounted) Lowrance[®] HDS LIVE 9 w/StructureScan[®] (uninstalled) Lowrance® HDS LIVE 12 w/StructureScan® (gimbal mounted) Lowrance® HDS LIVE 12 w/StructureScan® (RAM® mounted) Lowrance[®] HDS LIVE 12 w/StructureScan[®] (uninstalled) Humminbird[®] HELIX[™] 7 SI G3N (flush mounted)
 Humminbird[®] HELIX[™] 7 SI G3N (RAM[®] mounted) Humminbird[®] HELIX[™] 7 SI G3N (uninstalled) Humminbird[®] HELIX[™] 8 SI G3N w/GPS (flush mounted) Humminbird[®] HELIX[™] 8 SI G3N w/GPS (RAM[®] mounted) Humminbird[®] HELIX[™] 8 SI G3N wGPS (uninstalled) Humminbird[®] HELIX[™] 9 SI G3N w/GPS (flush mounted) Humminbird[®] HELIX[™] 9 SI G3N w/GPS (BAM[®] mounted) Humminbird® HELIX™ 9 SI G3N wGPS (uninstalled) - Humminbird® HELIX™ 10 SI G3N w/GPS (flush mounted) Humminbird[®] HELIX[™] 10 SI G3N w/GPS (RAM[®] mounted) Humminbird[®] HELIX[™] 10 SI G3N w/GPS (uninstalled) Humminbird[®] HELIX[™] 12 SI G3N w/GPS (gimbal mounted) Humminbird® HELIX™ 12 SI G3N w/GPS (RAM® mounted) Humminbird[®] HELIX[™] 12 SI G3N w/GPS (uninstalled) Humminbird[®] SOLIX[™] 10 SI G2 (flush mounted) Humminbird[®] SOLIX[™] 10 SI G2 (RAM[®] mounted) Humminbird[®] SOLIX[™] 10 SLG2 (uninstalled) Humminbird[®] SOLIX[™] 12 SI G2 (flush mounted) Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted) Humminbird[®] SOLIX[™] 12 SI G2 (uninstalled) Garmin[®] ECHOMAP[™] 93sv chartplotter (flush mounted) Garmin[®] ECHOMAP[™] 93sv chartplotter (RAM[®] mounted) Garmin[®] ECHOMAP[™] 93sy chartplotter (uninstalled) Garmin[®] GPSMAP[®] 7607 chartplotter (flush mounted) Garmin[®] GPSMAP[®] 7607 chartplotter (RAM[®] mounted) Garmin[®] GPSMAP[®] 7607 chartplotter (uninstalled) Garmin® GPSMAP® 7608 chartplotter (flush mounted) Garmin[®] GPSMAP[®] 7608 chartplotter (RAM[®] mounted) Garmin[®] GPSMAP[®] 7608 chartplotter (uninstalled) Garmin[®] GPSMAP[®] 7610 chartplotter (flush mounted) Garmin® GPSMAP® 7610 chartplotter (RAM® mounted) Garmin® GPSMAP® 7610 chartplotter (uninstalled) Garmin[®] GPSMAP[®] 7612 chartplotter (flush mounted) Garmin® GPSMAP® 7612 chartplotter (RAM® mounted) Garmin[®] GPSMAP[®] 7612 chartplotter (uninstalled) 2ND CONSOLE FISHFINDER - Lowrance[®] Elite-7 Ti² (RAM[®] mounted) Lowrance® Elite-9 Ti² (RAM® mounted) - Lowrance[®] Elite-12 Ti² (RAM[®] mounted) Lowrance[®] HDS LIVE 7 w/StructureScan[®] (RAM[®] mounted) - Lowrance® HDS LIVE 9 w/StructureScan® (RAM® mounted) - Lowrance® HDS LIVE 12 w/StructureScan® (RAM® mounted) Humminbird[®] HELIX[™] 7 SI G3N (RAM[®] mounted) Humminbird® HELIX™ 8 SI G3N w/GPS (RAM® mounted) Humminbird® HELIX™ 9 SI G3N w/GPS (RAM® mounted) Humminbird[®] HELIX[™] 10 SI G3N w/GPS (RAM[®] mounted) Humminbird® HELIX™ 12 SI G3N w/GPS (RAM® mounted) Humminbird[®]. SOLIX[™] 10 SI G2 (RAM[®] mounted) Humminbird[®]. SOLIX[™] 12 SI G2. (RAM[®] mounted) Garmin[®] ECHOMAP[™] 93sv chartplotter (RAM[®] mounted) Garmin[®] GPSMAP[®] 7607 chartplotter (RAM[®] mounted) Garmin[®] GPSMAP[®] 7608 chartplotter (RAM[®] mounted) Garmin® GPSMAP® 7610 chartplotter (RAM® mounted) Garmin[®] GPSMAP[®] 7612 chartplotter (RAM[®] mounted) ELECTRONICS

Garmin[®] GPSMAP[®] 7608 chartplotter (RAM[®] mounted)

Garmin[®] GPSMAP[®] 7610 chartplotter (flush mounted)

Garmin[®] GPSMAP[®] 7610 chartplotter (gimbal mounted)

Garmin® GPSMAP® 7610 chartplotter (RAM® mounted)

Garmin[®] GPSMAP[®] 7612 chartplotter (gimbal mounted)

Garmin[®] GPSMAP[®] 7612 chartplotter (RAM[®] mounted)

CONSOLE FISHFINDER EXCHANGE

Lowrance® Elite-9 Ti² (flush mounted

- Lowrance[®] Elite-9 Ti² (uninstalled)

- Lowrance[®] Elite-9 Ti² (RAM[®] mounted)

Add Panoptix[™] real-time 3D sonar to Garmin[®] chartplotter

Garmin[®] GPSMAP[®] 7612 chartplotter (flush mounted)

- KICKER® KMC1 Bluetooth®-capable stereo system

BATTERY CHARGER EXCHANGE

 Dual Pro[®] international battery charger - 4-bank, 40-amp battery charger

- Stealth 1, 20-amp battery charger w/out gauge

- Stealth 1, 20-amp battery charger w/gauge

CUSHIONS & SEATING

- NEW Dowco[®] CruiseAir[™] adjustable air suspension driver seat NEW Dowco® CruiseAir[™] fully-adjustable air suspension driver & passenger seats
- Power-adjust pneumatic lumbar support for driver's seat
- 2 bike seats (exchange)
- 2 jump seats (exchange)
- Center seat storage

ACCESSORIES

- NEW additional cleat at driver seat for quick tie down
- 2 oxygen generators w/shut-off switch
- 2 automatic bilge pumps Culling system
- CoolGuard[™] livewell cooling system (factory installed only)
- HvdroWave® electronic fish attractor
- Keel protector (Black or White)
- Line snooler
- Loc-R-Bar® w/alarm (dealer installation not included)

PERFORMANCE & STEERING

- Hot Foot[™] & trim lever on whee
- Dual trim lever on wheel (must order hydraulic jack plate)

TROLLING MOTOR

- Minn Kota® Fortrex® 24V, 80-lb. (36.29 kg) , 45" (1.14 m) trolling motor w/Universal Sonar 2
- Minn Kota® Fortrex® 24V, 80-lb. (36.29 kg), 52" (1.32 m) trolling motor w/Universal Sonar 2
- Minn Kota® Fortrex® 36V, 112-Ib. (50.8 kg), 45" (1.14 m) trolling motor w/Universal Sonar 2*
- Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg), 52" (1.32 m) trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg), 52" (1.32 m) trolling motor w/Universal Sonar 2 & i-Pilot®* Link"
- Minn Kota® Ultrex® 36V, 112-lb. (50.8 kg), 45" (1.14 m) trolling motor w/Universal Sonar 2 & i-Pilot®* *
- Minn Kota® Ultrex® 36V, 112-lb. (50.8 kg), 45" (1.14 m) trolling motor w/Universal Sonar 2 & i-Pilot®* Link™*
- Minn Kota® Ultrex® 36V, 112-lb. (50.8 kg), 52" (1.32 m) trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ultrex® 36V, 112-lb. (50.8 kg), 52" (1.32 m) trolling motor w/Universal Sonar 2 & i-Pilot®* Link™
- MotorGuide[®] X5 36V, 105-lb. (47.63 kg), 45" (1.14 m) trolling motor*
- MotorGuide[®] X5 36V, 105-lb. (47.63 kg), 50" (1.27 m) trolling motor*
- Minn Kota® Ultrex® 36V, 112-lb. (50.8 kg), 45" (1.14 m) trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ultrex® 36V, 112-Ib. (50.8 kg), 45" (1.14 m) trolling motor w/Universal Sonar 2 & i-Pilot Link*
- Minn Kota® Ultrex® 36V, 112-lb. (50.8 kg), 52" (1.32 m) trolling motor w/Universal Sonar 2 & i-Pilot*
- Minn Kota® Ultrex® 36V, 112-Ib. (50.8 kg), 52" (1.32 m) trolling motor w/Universal Sonar 2 & i-Pilot®* Link*
- MotorGuide[®] X5 36V, 105-Ib. (47.6 kg), 45" (1.14 m) trolling motor*
- MotorGuide[®] X5 36V, 105-lb. (47.6 kg), 50" (1.27 m) trolling motor*

FUNCTIONAL

- Snap-in cockpit mat
- Carpet embroidery
- Spinning rod organizer
- SmartCraft® gauges
- Removable port console & hardware (factory installed)
- 12" (30.48 cm) T-H Marine Atlas hydraulic jack plate
- 12" (30.48 cm) Bob's Action hydraulic jack plate
- Minn Kota® 8' (2.44 m) Talon shallow-water anchor (dealer installed)
- 2 Minn Kota® 8' (2.44 m) Talon shallow-water anchors (dealer installed)
- Minn Kota® 10' (3.05 m) Talon shallow-water anchor (dealer installed)
- 2 Minn Kota® 10' (3.05 m) Talon shallow-water anchors (dealer installed)
- Minn Kota® 12' (3.66 m) Talon shallow-water anchor (dealer installed)
- 2 Minn Kota® 12' (3.66 m) Talon shallow-water anchors (dealer installed)
- Power-Pole® Blade 8' (2.44 m) shallow-water anchor (dealer installed)
- 2 Power-Pole® Blade 8' (2.44 m) shallow-water anchors (dealer installed) - Power-Pole® Blade 10' (3.05 m) shallow-water anchor (dealer installed)
- 2 Power-Pole® Blade 10' (3.05 m) shallow-water anchors (dealer installed)

COVER

- Mooring cover for side or dual consoles-Charcoal
- 2-tone mooring cover for side or dual consoles-Black & White

TRAILER

- 18" (45.72 cm) custom silver machined aluminum wheel upgrade
- & Hercules RAPTIS R-T5 spare tire (must order fiberglass fenders)
- 18" (45.72 cm) custom matte Black aluminum alloy wheel upgrade & Hercules RAPTIS R-T5 spare tire (must order fiberglass fenders)
- Retractable trailer tie downs
- Tandem-axle 2 brakes

*Additional battery required & sold separately

ZZI STANDARD FEATURES & OP isit NITRO.COM to view more photos, see a complete list of motors, options, color combinations & features.

MOTOR OPTIONS

225 L Pro XS® FourStroke w/Torque Master

250 L Pro XS® FourStroke w/Torque Master

MERCURY® MOTOR

HULL LENGTH	BEAM	TRANSOM HEIGHT 22 " (55.88 cm)	мах. нр
20'2 " (6.15 m)	7'10'' (2.39 m)		250
MAX. PERSON CAPACITY 4/575 Ibs. (260.82 kg)	FUEL CAPACITY 50 gal. (189.27 l)		STORAGE LENGTH 23' 8" (7.21 m)

SPECIFICATIONS

Bottom width	6' 3" (2.08 m)
Depth inside	18" (45.72 cm)
Deadrise	16 degrees
Draft	16" (40.64 cm)
Average weight	2,000 lbs. (907.18 kg)
Average package weight	4,050 lbs. (1,837.05 kg)
Package width	8' 6" (2.59 m)

STANDARD FEATURES

COMFORT, CONVENIENCE & PEACE OF MIND

- NMMA[®] certified
- Flotation meets or exceeds NMMA® & U.S.C.G. requirements
- EPA-compliant fuel system
- Anti-fatigue, padded comfort bow deck Non-skid mats bow & stern
- 5 drink holders
- 4 stainless steel pull-up cleats
- Integrated fold-down stainless steel reboarding ladder, angled for
- allowing optional shallow-water anchor
- 4 grab handles (1 at each seat)
- Built-in tournament ruler & holder
- Fire extinguisher, horn & paddle

LIVEWELL SYSTEMS

- 2 aft 19-gal. (71.92 L) insulated GUARDIAN[™] livewells w/digital
- 750 GPH (2,839.06 LPH) livewell recirculation/pump-out system
- 500 GPH (1,892.71 LPH) aerator/fill pump
- Dual remote drain controls
- Botomolded w/rounded corners

TROLLING MOTOR

- Minn Kota® Maxxum® 24V, 70-lb. (31.75 kg) thrust, 42" (1.07 m)
- shaft, foot-control trolling motor Trolling motor pedal recess

CONSOLE

- NEW modular, aerodynamic console design w/expanded leg clearance & larger fishfinder surface
- Lowrance[®] HOOK² 5 Combo flush-mounted fishfinder
- Hvdraulic steering w/tilt
- Removable acrylic, tinted windscreen
- Ready to accept optional removable port console
- Veethree® multifunction instrumentation w/speedometer/fuel gauge, tach/trim gauge, voltmeter gauge & water pressure gauge

Boat may be shown w/optional equipment. Motors, specs & features subject to change w/out notice.

- Dash light dimmer
- Waterproof, capacitive touch digital keypad
- LED courtesy light - 12V outlet
- INTERIOR
- 42.5-sq.-ft. (4.0-sq.-m) anti-fatigue, padded bow deck for comfort
- & mobility
- Bike seat w/pedestal
- Folding fishing seat w/composite frame

- Z-CORE[™] seating system w/Force Flex suspension & contoured, rotomolded frame for driver & passenger seats
- NEW 1" (2.54 cm) lower, driver & passenger flat seat mounting
- Bow port & starboard rod hold-down straps Molded-in drainage channels around bow storage compartments
- Oversized, lockable bow port & starboard rod lockers w/lift assists
- for rods up to 8'(2.44 m)
- Rod organizer in port rod locker
- Oversized lockable bow center storage locker w/TACKLE
- MANAGEMENT SYSTEM[™] Step to bow deck w/62-qt. (58.67 L) insulated cooler & removable
- trash recentacle - Partner rod ramp w/rod handle organizer & hold-down strap
- Footrest w/non-skid mat under console(s)
- Step to aft deck w/lockable storage & removable tub
- Designated net storage behind seating 2 lift-out, molded aft storage boxes that will each accept seven
- 3700 tackle trays
- Molded utility rigging compartment for easy access to batteries
- & pumps & easy cleanup
- Lift-out tool/rope storage tray in rigging compartment
- Insulated aluminum lids w/welded corners
- 16-oz. (.45 kg) plush, marine-grade cut pile carpet on decks & floor Lockable latches

PERFORMANCE

- NITRO® VORTEX TECHNOLOGY™ (NVT™) hull for a smoother, drier
- · RAPID PLANING SYSTEM[™] (RPS[™]) for quicker holeshots &
- maximized speed
- 12" (30.48 cm) adjustable jack plate
- Rigging tube for organized wiring & abrasion resistance
- Stainless steel propeller

CONSTRUCTION & EXTERIOR

- 100% composite deck core w/superior thermal stability & strengthto-weight ratio Deck & hull chemically bonded & mechanically fastened w/stainless
- steel fasteners every 2" (5.08 cm)
- Gelcoated stringer/liner system Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom
- Low-profile gunnels to maximize deck size & for easier casting

ELECTRICAL

Angled bow panel w/trolling motor receptacle, anchor/light switch,

trim switch & capability to flush mount most 12" (30.5 cm) fishfinders LED console courtesy light

 \square

- Manual LED-lighted bow gear storage
- Automotive-style labeled fuse panel w/cover
- Interstate[®] cranking battery
- 2 heavy-duty Interstate® trolling batteries
- 2-bank, 8-amp battery charger w/exterior receptacle
- 6-gauge trolling motor wiring w/50-amp circuit breaker
- E-Start emergency jump start system
- Master power switch
- Waterproof Deutsch plugin gauge connectors
- Water/abrasion-resistant connectors

TRAILER

- Custom-fit, tandem-axle NITRO® trailer powder-coated w/ GALVASHIELD® Impact corrosion & chip protection for improved durability
- 7-nin connector

Safety cables

Z20pro

- 14" (35.56 cm) custom aluminum wheels w/radial tires
- NEW surge disc brakes on both axles
- No Touch Vortex hub lubrication system w/6-year, 100,000-mile (1,609.34 km) limited warranty
- Spare tire carrier w/matching spare
- All-welded rectangular GALVASHIELD® frame
- Space-saving swing-away tongue to reduce storage length
- Fold-away tongue jack
- Heavy-duty winch w/nylon strap & bow safety strap
- Integrated winch stand step w/safety handle for easier boarding/
- reboarding at bow while boat is on trailer
- Outboard motor support to reduce hull & transom stress while towing
- Carpeted bunks & fender boards to protect hull Submersible LED lights

(w/Pro, some standard features or options may not be available)

w/MEGA Down Imaging, CHIRP Digital Sonar & GPS

w/MEGA Down Imaging, CHIRP Digital Sonar & GPS

trolling motor w/Universal Sonar 2 & i-Pilot[®] Link™

(bracket mounted, dealer installed)

NEW bow Humminbird® HELIX™ 9 DI G3N gimbal-mounted fishfinder

Console Humminbird® HELIX™ 10 SI G3N flush-mounted fishfinder

Minn Kota® Ultrex® 36V, 112-Ib. (50.80 kg) thrust, 45" (1.14 m) shaft

3-way Ethernet communication between fishfinders & trolling motor

- 2 Minn Kota® 10' (3.05 m) Talon shallow-water anchors—Black

- Humminbird [®] HELIX [™] 7 SI G3N (RAM [®] mounted)
 Humminbird[®] HELIX[™] 7 SI G3N (uninstalled)
 Humminbird[®] HELIX[™] 8 SI G3N w/GPS (flush mounted)
 Humminbird[®] HELIX[™] 8 SI G3N w/GPS (RAM[®] mounted)
 Humminbird[®] HELIX[™] 8 SI G3N wGPS (uninstalled)
 Humminbird[®] HELIX[™] 9 SI G3N w/GPS (flush mounted)
 Humminbird[®] HELIX[™] 9 SI G3N w/GPS (RAM[®] mounted)
 Humminbird[®] HELIX[™] 9 SI G3N wGPS (uninstalled)
 Humminbird[®] HELIX[™] 10 SI G3N w/GPS (flush mounted) Humminbird[®] HELIX[™] 10 SI G3N w/GPS (RAM[®] mounted)
- Humminbird [®] HELIX [™] 10 SI G3N w/GPS (RAM [®] mounted)
- Humminbird® HELIX™ 10 SI G3N w/GPS (uninstalled)
- Humminbird [®] HELIX [™] 12 SI G3N w/GPS (gimbal mounted)
- Humminbird [®] HELIX [™] 12 SI G3N w/GPS (RAM [®] mounted)
- Humminbird [®] HELIX [™] 12 SI G3N w/GPS (uninstalled)
- Humminbird® SOLIX™ 10 SI G2 (flush mounted)
 Humminbird[®] SOLIX[™] 10 SI G2 (RAM[®] mounted)
 Humminbird[®] SOLIX[™] 10 SI G2 (uninstalled)
- Humminbird® SOLIX™ 12 SI G2 (flush mounted)
 Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted)
 Humminbird[®] SOLIX[™] 12 SI G2 (uninstalled)
- Garmin [®] ECHOMAP [™] 93sv chartplotter (flush mounted)
- Garmin [®] ECHOMAP [™] 93sv chartplotter (RAM [®] mounted)
- Garmin [®] ECHOMAP [™] 93sv chartplotter (uninstalled)
- Garmin [®] GPSMAP [®] 7607 chartplotter (flush mounted)
- Garmin [®] GPSMAP [®] 7607 chartplotter (RAM [®] mounted)
- Garmin [®] GPSMAP [®] 7607 chartplotter (uninstalled)
- Garmin [®] GPSMAP [®] 7608 chartplotter (flush mounted)
- Garmin [®] GPSMAP [®] 7608 chartplotter (RAM [®] mounted)
- Garmin [®] GPSMAP [®] 7608 chartplotter (uninstalled)
- Garmin [®] GPSMAP [®] 7610 chartplotter (flush mounted)
- Garmin [®] GPSMAP [®] 7610 chartplotter (RAM [®] mounted)
- Garmin [®] GPSMAP [®] 7610 chartplotter (uninstalled)
- Garmin [®] GPSMAP [®] 7612 chartplotter (flush mounted)
- Garmin [®] GPSMAP [®] 7612 chartplotter (RAM [®] mounted)
- Garmin [®] GPSMAP [®] 7612 chartplotter (uninstalled)
Gamming of onight 7012 on a tplotter (uninstaneu)

Power-adjust pneumatic lumbar support for driver's seat T-H Marine G-Force Conservation livewell culling system

Factory-applied keel protector

- 4-bank, 40-amp battery charger

- 1 extra trolling battery

BOW FISHFINDER

OPTIONS

- 1 standard & 1 automatic bilge pump

Retractable transom trailer tie downs

- Lowrance® HOOK² 5 Combo (flush mounted)

- Lowrance[®] HOOK² 7 Combo (flush mounted)

- Lowrance[®] Elite-7 Ti² (flush mounted)

Lowrance[®] Elite-7 Ti² (gimbal mounted)

Lowrance[®] Elite-7 Ti² (RAM[®] mounted)

- Lowrance[®] Elite-9 Ti² (gimbal mounted)

- Lowrance[®] Elite-9 Ti² (RAM[®] mounted)

- Lowrance[®] Elite-12 Ti² (flush mounted)

Lowrance[®] Elite-12 Ti² (gimbal mounted)

Lowrance[®] Elite-12 Ti² (RAM[®] mounted)

Lowrance[®] HDS LIVE 7 w/StructureScan[®] (flush mounted)

- Lowrance[®] HDS LIVE 7 w/StructureScan[®] (gimbal mounted)

- Lowrance® HDS LIVE 7 w/StructureScan® (RAM® mounted)

- Lowrance[®] HDS LIVE 9 w/StructureScan[®] (gimbal mounted)

- Lowrance[®] HDS LIVE 9 w/StructureScan[®] (RAM[®] mounted)

Lowrance® HDS LIVE 12 w/StructureScan® (gimbal mounted)

Lowrance® HDS LIVE 12 w/StructureScan® (RAM® mounted)

Add LiveSight real-time 3D sonar to Lowrance® fishfinder

Humminbird[®] HELIX[™] 7 SI G3N (flush mounted)

- Humminbird® HELIX™ 7 SI G3N (gimbal mounted) - Humminbird® HELIX™ 7 SI G3N (RAM® mounted)

- Humminbird[®] HELIX[™] 8 SI G3N w/GPS (flush mounted)

- Humminbird[®] HELIX[™] 8 SI G3N w/GPS (gimbal mounted)

- Humminbird[®] HELIX[™] 8 SI G3N w/GPS (RAM[®] mounted)

- Humminbird[®] HELIX[™] 9 SI G3N w/GPS (gimbal mounted)

Humminbird[®] HELIX[™] 9 SI G3N w/GPS (RAM[®] mounted)

Humminbird® HELIX™ 10 SI G3N w/GPS (gimbal mounted)

- Humminbird® HELIX™ 10 SI G3N w/GPS (RAM® mounted)

Humminbird[®] HELIX[™] 12 SI G3N w/GPS (gimbal mounted)

- Humminbird® HELIX™ 12 SI G3N w/GPS (RAM® mounted)

Humminbird[®] SOLIX[™] 10 SI G2 (flush mounted)

Humminbird® SOLIX™ 10 SI G2 (jimbal mounted)
 Humminbird® SOLIX™ 10 SI G2 (gimbal mounted)
 Humminbird® SOLIX™ 10 SI G2 (RAM® mounted)

Humminbird[®] SOLIX[™] 12 SI G2 (gimbal mounted)

Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted)

Garmin[®] ECHOMAP[™] 93sv chartplotter (flush mounted)

Garmin[®] ECHOMAP[™] 93sy chartplotter (gimbal mounted)

Garmin[®] ECHOMAP[™] 93sv chartplotter (RAM[®] mounted)

Garmin[®] GPSMAP[®] 7607 chartplotter (flush mounted)

Garmin[®] GPSMAP[®] 7607 chartplotter (gimbal mounted)

Garmin® GPSMAP® 7607 chartplotter (RAM® mounted)

Garmin® GPSMAP® 7608 chartplotter (gimbal mounted)

Garmin® GPSMAP® 7608 chartplotter (RAM® mounted)

Garmin[®] GPSMAP[®] 7610 chartplotter (gimbal mounted)

Garmin[®] GPSMAP[®] 7610 chartplotter (RAM[®] mounted)

Garmin[®] GPSMAP[®] 7612 chartplotter (flush mounted)

Garmin[®] GPSMAP[®] 7612 chartplotter (gimbal mounted)

Garmin[®] GPSMAP[®] 7612 chartplotter (RAM[®] mounted)

CONSOLE FISHFINDER EXCHANGE

Lowrance[®] HOOK² 7 Combo (flush mounted

Lowrance[®] HOOK² 7 Combo (uninstalled)

- Lowrance[®] Elite-7 Ti² (flush mounted)

Lowrance[®] Elite-7 Ti² (uninstalled)

Lowrance[®] Elite-9 Ti² (uninstalled)

- Lowrance[®] Elite-12 Ti² (uninstalled)

Lowrance® Elite-9 Ti² (flush mounted)

Lowrance[®] Elite-9 Ti² (RAM[®] mounted)

- Lowrance[®] Elite-12 Ti² (flush mounted)

- Lowrance[®] Elite-12 Ti² (RAM[®] mounted)

- Lowrance[®] Elite-7 Ti² (RAM[®] mounted)

Add Panoptix[™] real-time 3D sonar to Garmin[®] chartplotter

Lowrance[®] HDS LIVE 7 w/StructureScan[®] (flush mounted)

Lowrance[®] HDS LIVE 7 w/StructureScan[®] (uninstalled)

Lowrance[®] HDS LIVE 9 w/StructureScan[®] (uninstalled)

- Lowrance® HDS LIVE 12 w/StructureScan® (uninstalled)

Humminbird[®] HELIX[™] 7 SI G3N (flush mounted)

Lowrance® HDS LIVE 9 w/StructureScan® (flush mounted)

Lowrance[®] HDS LIVE 9 w/StructureScan[®] (RAM[®] mounted)

- Lowrance[®] HDS LIVE 12 w/StructureScan[®] (gimbal mounted)

Lowrance® HDS LIVE 12 w/StructureScan® (RAM® mounted)

Lowrance® HDS LIVE 7 w/StructureScan® (RAM® mounted)

Garmin[®] GPSMAP[®] 7610 chartplotter (flush mounted)

Garmin® GPSMAP® 7608 chartplotter (flush mounted)

- Lowrance[®] HDS LIVE 9 w/StructureScan[®] (flush mounted)

- Lowrance[®] Elite-9 Ti² (flush mounted)

Hot Foot[™] throttle & Pro-Trim lever

2ND CONSOLE FISHFINDER

 Lowrance[®] Elite-7 Ti² (RAM[®] mounted) - Lowrance® Elite-9 Ti2 (RAM® mounted) - Lowrance[®] Elite-12 Ti² (RAM[®] mounted) - Lowrance[®] HDS LIVE 7 w/StructureScan[®] (RAM[®] mounted) - Lowrance® HDS LIVE 9 w/StructureScan® (RAM® mounted) - Lowrance® HDS LIVE 12 w/StructureScan® (RAM® mounted) Humminbird® HELIX[™] 7 SI G3N (RAM® mounted) Humminbird® HELIX™ 8 SI G3N w/GPS (RAM® mounted) Humminbird® HELIX™ 9 SI G3N w/GPS (RAM® mounted) Humminbird[®] HELIX[™] 10 SI G3N w/GPS (RAM[®] mounted) Humminbird[®] HELIX[™] 12 SI G3N w/GPS (RAM[®] mounted) Humminbird[®] SOLIX[™] 10 SI G2 (RAM[®] mounted) Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted) Garmin[®] ECHOMAP[™] 93sv chartplotter (RAM[®] mounted) Garmin®. GPSMAP® 7607 chartplotter (RAM® mounted) Garmin®. GPSMAP® 7608 chartplotter (RAM® mounted) Garmin[®]. GPSMAP[®] 7610 chartplotter (RAM[®] mounted) Garmin[®]. GPSMAP[®] 7612 chartplotter (RAM[®] mounted)

ELECTRONICS

- KICKER® KMC1 Bluetooth®-capable stereo system

BATTERY CHARGER EXCHANGE

- Dual Pro[®] international battery charge
- 2-bank, 20-amp battery charger
- 3-bank, 30-amp battery charger
- 4-bank, 40-amp battery charger
- Stealth 1, 20-amp battery charger w/out gauge - Stealth 1, 20-amp battery charger w/gauge

CUSHIONS & SEATING

NEW Dowco® CruiseAir™ fully-adjustable air suspension driver seat **NEW** Dowco[®] CruiseAir[™] fully-adjustable air suspension driver & passenger seats

- Power-adjust pneumatic lumbar support for driver's seat
- 2 bike seats (exchange)
- 2 jump seats (exchange)
- Center seat
- Hydraulic pedestal (exchange)

ACCESSORIES

• **NEW** additional cleat at driver seat for quick tie down

- 2 oxygen generators
- 2 oxygen generators w/shut-off switch Culling system
- CoolGuard[™] livewell cooling system (factory installed only)
- HydroWave[®] electronic fish attractor
- Keel protector (Black or White)
- Loc-R-Bar® w/alarm (dealer installation not included)
- Port under deck storage drawer
- X-Grip[®] mobile phone holder

PERFORMANCE & STEERING

- Hot Foot[™] & trim lever on wheel
- Dual trim lever on wheel (must order hydraulic jack plate)

TROLLING MOTOR

- Minn Kota® Fortrex® 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2
- Minn Kota® Fortrex® 24V, 80-lb. (36.29 kg) thrust, 52" (1.32 m) shaft trolling motor w/Universal Sonar 2
- Minn Kota® Fortrex® 36V, 112-Ib. (50.8 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2*
- Minn Kota[®] Maxxum[®] 24V, 80-lb. (36.29 kg) thrust, 42" (1.07 m) shaft trolling motor
- Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg) thrust, 52″ (1.32 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®
- Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg) thrust, 52" (1.32 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot® Link*
- Minn Kota® Ultrex® 36V, 112-lb. (50.8 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ultrex® 36V, 112-lb. (50.8 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®* Link™*
- Minn Kota® Ultrex® 36V, 112-lb. (50.8 kg) thrust, 52" (1.32 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ultrex® 36V, 112-lb. (50.8 kg) thrust, 52" (1.32 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®* Link™*
- MotorGuide® X5 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m) shaft trolling motor
- MotorGuide® X5 36V, 105-lb. (47.63 kg) thrust, 45" (1.14 m) shaft trolling motor*
- MotorGuide® X5 36V, 105-lb. (47.63 kg) thrust, 50" (1.27 m) shaft trolling motor*

FUNCTIONAL

- Carpet embroidery
- Spinning rod organizer
- SmartCraft® gauges
- Ventilation fan in bow storage box
- Removable port console & hardware (factory installed)
 12" (30.48 cm) T-H Marine Atlas hydraulic jack plate
- 12" (30.48 cm) Bob's Action hydraulic jack plate
- Minn Kota® 8' (2.44 m) Talon shallow anchor—Black (dealer installed)
- 2 Minn Kota[®] 8' (2.44 m) Talon shallow-water anchors—Black (dealer installed
- Minn Kota® 10' (3.05 m) Talon shallow-water anchor-Black (dealer installed
- 2 Minn Kota® 10' (3.05 m) Talon shallow-water anchors—Black (dealer installed)
- Minn Kota® 12' (3.66 m) Talon shallow-water anchor—Silver (dealer installed)
- 2 Minn Kota® 12' (3.66 m) Talon shallow-water anchors-Silver (dealer installed
- Power-Pole® Blade 8' (2.44 m) shallow-water anchor (dealer installed
- 2 Power-Pole® Blade 8' (2.44 m) shallow-water anchors (dealer installed
- Power-Pole® Blade 10' (3.05 m) shallow-water anchor (dealer installed)
- 2 Power-Pole® Blade 10' (3.05 m) shallow-water anchors (dealer installed)

COVERS

- Mooring cover for side or dual consoles—Charcoal
- 2-tone mooring cover for side or dual consoles-Black & Charcoal

TRAILER

- Retractable trailer tie downs
- Fiberglass fenders for tandem-axle trailer
- 18" (45.72 cm) custom silver machined aluminum wheel upgrade & Hercules RAPTIS R-T5 spare tire (must order fiberglass fenders)
- 18" (45.72 cm) custom matte Black aluminum alloy wheel upgrade
- & Hercules RAPTIS R-T5 spare tire (must order fiberglass fenders)

*Additonal battery required & sold separately

7 🚍 STANDARD FEATURES & isit NITRO.COM to view more photos, see a complete list of motors, options, color combinations & features.

HULL LENGTH	BEAM	TRANSOM HEIGHT 23 " (58.42 cm)	мах. нр
19'4" (5.89 m)	7' 10'' (2.39 m)		200
MAX. PERSON CAPACITY	FUEL CAPACITY	MAX. WEIGHT CAPACITY	STORAGE LENGTH 22' 7" (6.88 m)
4/500 Ibs. (226.80 kg)	50 gal. (189.27 l)	1,375 Ibs. (623.69 kg)	

SPECIFICATIONS

Bottom width	6' 2" (1.88 m)
Depth inside	18.5" (46.99 cm)
Deadrise	16 degrees
Draft	15" (38.10 cm)
Average weight	1,850 lbs. (839.15 kg)
Average package weight	3,249 lbs. (1,473.72 kg)
Package width	8' 6" (2.59 m)

STANDARD FEATURES

COMFORT, CONVENIENCE & PEACE OF MIND

- NMMA[®] certified
- Flotation meets or exceeds NMMA® & U.S.C.G. requirements
- EPA-compliant fuel system
- Non-skid mats bow & stern
- 6 drink holders
- 4 stainless steel pull-up cleats - Integrated fold-down stainless steel reboarding ladder, angled for
- allowing optional shallow-water anchor
- 4 grab handles (1 at each seat)
- Built-in tournament ruler & holder
- Fire extinguisher, horn & paddle

LIVEWELL SYSTEMS

- 2 aft 19-gal. (71.92 L) insulated GUARDIAN[™] livewells w/digital
- 750 GPH (2,839.06 LPH) livewell recirculation/pump-out system
- 500 GPH (1,892.71 LPH) aerator/fill pump
- Dual remote drain controls
- Rotomolded w/rounded corners

TROLLING MOTOR

- Minn Kota[®] Maxxum[®] 24V, 70-lb. (31.75 kg) thrust, 42" (1.07 m) shaft, foot-control trolling motor
- Trolling motor pedal recess

CONSOLE

- NEW modular, aerodynamic console design w/expanded leg clearance & larger fishfinder surface
- Lowrance[®] HOOK² 5 Combo flush-mounted fishfinder
- Hvdraulic steering w/tilt
- Removable acrylic, tinted windscreen
- Ready to accept optional removable port console
- Veethree® multifunction instrumentation w/speedometer/fuel gauge, tach/trim gauge, voltmeter gauge & water pressure gauge
- Dash light dimmer
- Waterproof, capacitive touch digital keypad
- LED courtesy light - 12V outlet

INTERIOR

- 34-sq.-ft. (3.2-sq.-m) bow deck for casting mobility w/lots of storage
- Bike seat w/pedestal
- Folding fishing seat w/composite frame
- Z-CORE[™] seating system w/Force Flex suspension & contoured,

- rotomolded frame for driver & passenger seats
- NEW 1" (2.54 cm) lower, driver & passenger flat seat mounting
- Bow port & starboard rod hold-down straps
- Molded-in drainage channels around bow storage compartments
- Oversized, lockable bow port & starboard rod lockers w/lift assists
- for rods up to 8' (2.44 m)

MOTOR OPTIONS

MERCURY® MOTOR

200 L Pro XS® FourStroke

- Oversized lockable bow center storage locker
- Step to bow deck w/62-qt. (58.67 L) insulated cooler & removable
- trash receptacle Partner rod ramp w/rod handle organizer & hold-down strap
- Footrest w/non-skid mat under console(s)
- Designated net storage behind seating
- 2 lift-out, molded aft storage boxes that will each accept seven
- 3700 tackle travs Molded utility rigging compartment for easy access to batteries
- & pumps & easy cleanup
- Lift-out tool/rope storage tray in rigging compartment
- Insulated aluminum lids w/welded corners
 - 16-oz. (.45 kg) plush, marine-grade cut pile carpet on decks & floor I ockable latches

PERFORMANCE

- NITRO[®] VORTEX TECHNOLOGY[™] (NVT[™]) hull for a smoother,
- drier ride
- RAPID PLANING SYSTEM[™] (RPS[™]) for quicker holeshots & maximized speed
- 8" (20.32 cm) adjustable jack plate
- Rigging tube for organized wiring & abrasion resistance Stainless steel propeller

- **CONSTRUCTION & EXTERIOR** 100% composite deck core w/superior thermal stability & strength-
- to-weight ratio Deck & hull chemically bonded & mechanically fastened w/stainless
- steel fasteners every 2" (5.08 cm)
- Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety Full-width fiberglass-encapsulated composite transom
- Low-profile gunnels to maximize deck size & for easier casting

ELECTRICAL

- Bow panel w/trolling motor receptacle, anchor/light switch, trim switch & capability to flush mount 10" (25.4 cm) fishfinder LED console courtesy light
- Manual LED-lighted bow gear storage
- Automotive-style labeled fuse panel w/cover

 \square

OPTIONS

BOW FISHFINDER

 Lowrance[®] HOOK² 5 Combo (flush mounted) Lowrance[®] HOOK² 7 Combo (flush mounted) Lowrance[®] Elite-7 Ti² (flush mounted) Lowrance[®] Elite-7 Ti² (gimbal mounted) Lowrance[®] Elite-7 Ti² (RAM[®] mounted) Lowrance[®] Elite-9 Ti² (flush mounted) - Lowrance[®] Elite-9 Ti² (gimbal mounted) - Lowrance[®] Elite-9 Ti² (RAM[®] mounted) Lowrance[®] Elite-12 Ti² (flush mounted) - Lowrance[®] Elite-12 Ti² (gimbal mounted) Lowrance[®] Elite-12 Ti² (RAM[®] mounted) Lowrance® HDS LIVE 7 w/StructureScan® (flush mounted) Lowrance[®] HDS LIVE 7 w/StructureScan[®] (gimbal mounted) Lowrance[®] HDS LIVE 7 w/StructureScan[®] (RAM[®] mounted) Lowrance[®] HDS LIVE 9 w/StructureScan[®] (flush mounted) Lowrance® HDS LIVE 9 w/StructureScan® (gimbal mounted)
 Lowrance® HDS LIVE 9 w/StructureScan® (RAM® mounted) Lowrance® HDS LIVE 12 w/StructureScan® (gimbal mounted) Lowrance® HDS LIVE 12 w/StructureScan® (RAM® mounted) Add LiveSight real-time 3D sonar to Lowrance® fishfinder - Humminbird[®] HELIX[™] 7 SI G3N (flush mounted) - Humminbird[®] HELIX[™] 7 SI G3N (gimbal mounted) - Humminbird[®] HELIX[™] 7 SI G3N (RAM[®] mounted) - Humminbird[®] HELIX[™] 8 SI G3N w/GPS (flush mounted) - Humminbird® HELIX™ 8 SI G3N w/GPS (gimbal mounted) - Humminbird[®] HELIX[™] 8 SI G3N w/GPS (RAM[®] mounted) Humminbird[®] HELIX[™] 9 SI G3N w/GPS (gimbal mounted) - Humminbird® HELIX™ 9 SI G3N w/GPS (RAM® mounted) - Humminbird[®] HELIX[™] 10 SI G3N w/GPS (gimbal mounted) Humminbird[®] HELIX[™] 10 SI G3N w/GPS (RAM[®] mounted) Humminbird[®] HELIX[™] 12 SI G3N w/GPS (gimbal mounted) Humminbird® HELIX™ 12 SI G3N w/GPS (ŘAM® mounted) - Humminbird[®] SOLIX[™] 10 SI G2 (flush mounted) Humminbird[®] SOLIX[™] 10 SI G2 (gimbal mounted) - Humminbird® SOLIX™ 10 SI G2 (ŘAM® mounted) - Humminbird[®] SOLIX[™] 12 SI G2 (gimbal mounted) Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted) Garmin[®] ECHOMAP[™] 93sy chartplotter (flush mounted) Garmin[®] ECHOMAP[™] 93sv chartplotter (gimbal mounted) Garmin[®] ECHOMAP[™] 93sv chartplotter (RAM[®] mounted) Garmin[®] GPSMAP[®] 7607 chartplotter (flush mounted) Garmin[®] GPSMAP[®] 7607 chartplotter (idstrinduited)
 Garmin[®] GPSMAP[®] 7607 chartplotter (gimbal mounted)
 Garmin[®] GPSMAP[®] 7607 chartplotter (RAM[®] mounted) Garmin[®] GPSMAP[®] 7608 chartplotter (flush mounted) Garmin® GPSMAP® 7608 chartplotter (gimbal mounted) Garmin® GPSMAP® 7608 chartplotter (RAM® mounted) Garmin[®] GPSMAP[®] 7610 chartplotter (flush mounted) Garmin[®] GPSMAP[®] 7610 chartplotter (gimbal mounted) Garmin[®] GPSMAP[®] 7610 chartplotter (RAM[®] mounted) Garmin[®] GPSMAP[®] 7612 chartplotter (flush mounted) Garmin[®] GPSMAP[®] 7612 chartplotter (gimbal mounted) Garmin® GPSMAP® 7612 chartplotter (RAM® mounted) Add Panoptix[™] real-time 3D sonar to Garmin[®] chartplotter **CONSOLE FISHFINDER EXCHANGE** Lowrance[®] HOOK² 7 Combo (flush mounted) Lowrance[®] HOOK² 7 Combo (uninstalled) Lowrance® Elite-7 Ti² (flush mounted) Lowrance[®] Elite-7 Ti² (RAM[®] mounted) Lowrance[®] Elite-7 Ti² (uninstalled) Lowrance[®] Elite-9 Ti² (flush mounted) Lowrance[®] Elite-9 Ti² (RAM[®] mounted) Lowrance[®] Elite-9 Ti² (uninstalled) - Lowrance[®] Elite-12 Ti² (flush mounted) - Lowrance[®] Elite-12 Ti² (RAM[®] mounted) - Lowrance[®] Elite-12 Ti² (uninstalled) Lowrance® HDS LIVE 7 w/StructureScan® (flush mounted) Lowrance® HDS LIVE 7 w/StructureScan® (RAM® mounted) Lowrance[®] HDS LIVE 7 w/StructureScan[®] (uninstalled) Lowrance® HDS LIVE 9 w/StructureScan® (flush mounted) Lowrance[®] HDS LIVE 9 w/StructureScan[®] (RAM[®] mounted) Lowrance[®] HDS LIVE 9 w/StructureScan[®] (uninstalled) Lowrance[®] HDS LIVE 12 w/StructureScan[®] (gimbal mounted) Lowrance® HDS LIVE 12 w/StructureScan® (RAM® mounted)

- Lowrance® HDS LIVE 12 w/StructureScan® (uninstalled)
- Humminbird[®] HELIX[™] 7 SI G3N (flush mounted)
- Humminbird[®] HELIX[™] 7 SI G3N (RAM[®] mounted)
- Humminbird[®] HELIX[™] 7 SI G3N (uninstalled)
- Humminbird[®] HELIX[™] 8 SI G3N w/GPS (flush mounted)
- Humminbird[®] HELIX[™] 8 SI G3N w/GPS (RAM[®] mounted)
- Humminbird[®] HELIX[™] 8 SI G3N wGPS (uninstalled)
- Humminbird[®] HELIX[™] 9 SI G3N w/GPS (flush mounted)
- Humminbird[®] HELIX[™] 9 SI G3N w/GPS (RAM[®] mounted)
- Humminbird[®] HELIX[™] 9 SI G3N wGPS (uninstalled)
- Humminbird[®] HELIX[™] 10 SI G3N w/GPS (flush mounted)

TRAILER - Custom, single-axle NITRO® trailer w/GALVASHIELD® Impact corrosion & chip protection for improved durability 7-pin connector 15" (38.1 cm) chrome wheels w/radial tires

Water/abrasion-resistant connectors

Interstate® cranking battery

Master power switch

- 2 heavy-duty Interstate® trolling batteries

Waterproof Deutsch plugin gauge connectors

2-bank, 8-amp battery charger w/exterior receptacle

6-gauge trolling motor wiring w/50-amp circuit breaker

- Surge disc brakes No Touch Vortex hub lubrication system w/6-year, 100,000-mile
- (1.609.34 km) limited warranty All-welded rectangular GALVASHIELD® frame
- Space-saving swing-away tongue to reduce storage length
- Fold-away tongue jack Heavy-duty winch w/nylon strap & bow safety strap Outboard motor support to reduce hull & transom stress while
- towing Carpeted bunks & fender boards to protect hull

(w/Pro, some standard features or options may not be available)

NEW console Humminbird[®] HELIX[™] 8 SI G3N flush-mounted

fishfinder w/MEGA Down Imaging, CHIRP Digital Sonar & GPS

Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m) shaft

- 3-way Ethernet communication between fishfinders & trolling motor

Upgraded to tandem-axle trailer w/integrated winch stand step,

Upgraded to custom 14" (35.56 cm) aluminum trailer wheels w/spare

w/MEGA Down Imaging, CHIRP Digital Sonar & GPS

trolling motor w/Universal Sonar 2 & i-Pilot® Link*

- T-H Marine G-Force Conservation livewell culling system

steel fender & retractable transom trailer tie downs

NEW bow Humminbird® HELIX™ 8 DI G3N gimbal-mounted fishfinder

- Submersible LED lights
- Safety cables

ZISPRO

- Factory-applied keel protector

Hot Foot™ throttle & Pro-Trim lever

3-bank, 30-amp battery charger

Bow port rod organizer

Bow tool/drink holder

- Humminbird [®] HELIX [™] 10 SI G3N w/GPS (RAM [®] mounted)
- Humminbird [®] HELIX [™] 10 SI G3N w/GPS (uninstalled)
- Humminbird® HELIX™ 12 SI G3N w/GPS (gimbal mounted)
- Humminbird® HELIX™ 12 SI G3N w/GPS (RAM® mounted)
- Humminbird [®] HELIX [™] 12 SI G3N w/GPS (uninstalled)
- Humminbird [®] SOLIX [™] 10 SI G2 (flush mounted)
 Humminbird[®] SOLIX[™] 10 SI G2 (RAM[®] mounted)
- Humminbird® SOLIX™ 10 SI G2 (uninstalled)
 Humminbird[®] SOLIX[™] 12 SI G2 (flush mounted)
 Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted)
- Humminbird® SOLIX™ 12 SI G2 (uninstalled)
- Garmin® ECHOMAP™ 93sv chartplotter (flush mounted)
- Garmin [®] ECHOMAP [™] 93sv chartplotter (RAM [®] mounted)
 Garmin[®] ECHOMAP[™] 93sv chartplotter (uninstalled)
- Garmin [®] GPSMAP [®] 7607 chartplotter (flush mounted)
- Garmin [®] GPSMAP [®] 7607 chartplotter (RAM [®] mounted)
 Garmin[®] GPSMAP[®] 7607 chartplotter (uninstalled)
 Garmin[®] GPSMAP[®] 7608 chartplotter (flush mounted)
- Garmin [®] GPSMAP [®] 7608 chartplotter (RAM [®] mounted)
 Garmin[®] GPSMAP[®] 7608 chartplotter (uninstalled)
 Garmin[®] GPSMAP[®] 7610 chartplotter (flush mounted)
 Garmin[®] GPSMAP[®] 7610 chartplotter (RAM[®] mounted)
 Garmin[®] GPSMAP[®] 7610 chartplotter (uninstalled)
- Garmin [®] GPSMAP [®] 7612 chartplotter (flush mounted)
- Garmin [®] GPSMAP [®] 7612 chartplotter (RAM [®] mounted)
 Garmin[®] GPSMAP[®] 7612 chartplotter (uninstalled)

2ND CONSOLE FISHFINDER

 Lowrance[®] Elite-7 Ti² (RAM[®] mounted) - Lowrance® Elite-9 Ti² (RAM® mounted) - Lowrance[®] Elite-12 Ti² (RAM[®] mounted) Lowrance[®] HDS LIVE 7 w/StructureScan[®] (RAM[®] mounted) Lowrance[®] HDS LIVE 9 w/StructureScan[®] (RAM[®] mounted) - Lowrance® HDS LIVE 12 w/StructureScan® (RAM® mounted) Humminbird[®] HELIX[™] 7 SI G3N (RAM[®] mounted) Humminbird[®] HELIX[™] 8 SI G3N w/GPS (RAM[®] mounted) Humminbird[®] HELIX[™] 9 SI G3N w/GPS (RAM[®] mounted) Humminbird® HELIX™ 10 SI G3N w/GPS (RAM® mounted) Humminbird[®] HELIX[™] 12 SI G3N w/GPS (RAM[®] mounted) Humminbird® SOLIX™ 10 SI 62 (RAM® mounted)
 Humminbird® SOLIX™ 12 SI 62 (RAM® mounted)
 Garmin® ECHOMAP™ 93sv chartplotter (RAM® mounted) Garmin[®] GPSMAP[®] 7607 chartplotter (RAM[®] mounted) Garmin® GPSMAP® 7608 chartplotter (RAM® mounted) Garmin[®] GPSMAP[®] 7610 chartplotter (RAM[®] mounted) Garmin[®] GPSMAP[®] 7612 chartplotter (RAM[®] mounted)

ELECTRONICS

- KICKER® KMC1 Bluetooth®-capable stereo system

BATTERY CHARGER EXCHANGE

- Dual Pro[®] international battery charge
- 2-bank, 20-amp battery charger
- 3-bank, 30-amp battery charger
- 4-bank, 40-amp battery charger
- Stealth 1, 20-amp battery charger w/out gauge Stealth 1, 20-amp battery charger w/gauge

CUSHIONS & SEATING

- 2 bike seats (exchange) - 2 jump seats (exchange) Center seat
- Center seat storage Hydraulic pedestal (exchange)

- **ACCESSORIES**
- NEW additional cleat at driver seat for quick tie down
- 2 oxygen generators
- Bow tool/drink holder Culling system
- CoolGuard[™] livewell cooling system (factory installed only) HydroWave[®] electronic fish attractor
- · Keel protector (Black or White)
- Loc-R-Bar® w/alarm (dealer installation not included)
- Port under deck storage drawer
- Snap-in sandwich tray
- X-Grip[®] mobile phone holder

PERFORMANCE & STEERING

Hot Foot[™] & trim lever on wheel

- Dual trim lever on wheel (must order hydraulic jack plate)

TROLLING MOTOR

- Minn Kota® Fortrex® 24V. 80-lb. (36.29 kg) thrust. 45" (1.14 m) shaft trolling motor w/Universal Sonar 2
- Minn Kota® Fortrex® 24V, 80-lb. (36.29 kg) thrust, 52" (1.32 m) shaft trolling motor w/Universal Sonar 2
- Minn Kota® Fortrex® 36V, 112-lb. (50.8 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 (additional battery required & sold separately)

- Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg) thrust, 45″ (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®* Link"
- Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg) thrust, 52" (1.32 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg) thrust, 52″ (1.32 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®* Link*
- Minn Kota® Ultrex® 36V, 112-lb. (50.8 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ultrex® 36V, 112-Ib. (50.8 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®* Link™
- Minn Kota® Ultrex® 36V, 112-lb. (50.8 kg) thrust, 52" (1.32 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®* - Minn Kota® Ultrex® 36V, 112-Ib. (50.8 kg) thrust, 52" (1.32 m) shaft
- trolling motor w/Universal Sonar 2 & i-Pilot®* Link™*
- MotorGuide® X5 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m) shaft trolling motor
- MotorGuide® X5 36V, 105-lb. (47.63 kg) thrust, 45" (1.14 m) shaft trolling motor *

FUNCTIONAL

- Anti-fatigue mat
- Carpet embroidery
- Magnetic under-lid lure holder/organizer
- Rod organizer
- SmartCraft® gauges Ventilation fan in bow storage box
- Removable port console & hardware (factory installed)
- 8" (20.32 cm) T-H Marine Atlas hydraulic jack plate
- 8" (20.32 cm) Bob's Action hydraulic jack plate
- Minn Kota® 8' (2.44 m) Talon shallow-water anchor—Black (dealer installed)
- 2 Minn Kota® 8' (2.44 m) Talon shallow-water anchors—Black (dealer installed)
- Minn Kota® 10' (3.05 m) Talon shallow-water anchor—Black (dealer installed)
- 2 Minn Kota® 10' (3.05 m) Talon shallow-water anchors—Black (dealer installed
- Minn Kota® 12' (3.66 m) Talon shallow-water anchor—Silver (dealer installed)
- 2 Minn Kota® 12' (3.66 m) Talon shallow-water anchors—Silver (dealer installed)
- Power-Pole® Blade 8' (2.44 m) shallow-water anchor (dealer installed
- 2 Power-Pole® Blade 8' (2.44 m) shallow-water anchors (dealer installed)
- Power-Pole® Blade 10' (3.05 m) shallow-water anchor (dealer installed)
- 2 Power-Pole® Blade 10' (3.05 m) shallow-water anchors (dealer installed)

COVERS

- Mooring cover for side or dual consoles-Charcoal
- 2-tone mooring cover for side or dual consoles-Black & Charcoal

TRAILER

- Retractable trailer tie downs
- Fiberglass fenders for tandem-axle trailer
- Tandem-axle trailer upgrade w/2 brakes, 14" (35.56 cm) tire/wheel upgrade & spare tire
- Single-axle spare tire
- 18" (45.72 cm) custom silver machined aluminum wheel upgrade
- & Hercules RAPTIS R-T5 spare tire (must order fiberglass fenders)
- 18" (45.72 cm) custom matte Black aluminum alloy wheel upgrade & Hercules RAPTIS R-T5 spare tire (must order fiberglass fenders)

*Additonal battery required & sold separately

EF STANDARD FEATURES Visit NITRO.COM to view more photos, see a complete list of motors, options, color combinations & features.

HULL LENGTH	BEAM	TRANSOM HEIGHT	мах. нр
18'8 " (5.69 m)	7' 10'' (2.39 m)	22.5 " (57.15 cm)	175
MAX. PERSON CAPACITY	FUEL CAPACITY	MAX. WEIGHT CAPACITY	STORAGE LENGTH 21'3'' (6.48 m)
4/550 Ibs. (249.48 kg)	40 (jal. (151.42 l)	1,350 Ibs. (612.35 kg)	

SPECIFICATIONS

Bottom width	6' 3" (1.91 m)
Depth inside	18.5" (46.99 cm)
Deadrise	16 degrees
Draft	15" (38.10 cm)
Average weight	1,700 lbs. (771.11 kg)
Average package weight	3,200 lbs. (1,451.50 kg)
Package width	8' 6" (2.59 m)

STANDARD FEATURES

COMFORT, CONVENIENCE & PEACE OF MIND

- NMMA[®] certified
- Flotation meets or exceeds NMMA® & U.S.C.G. requirements
- EPA-compliant fuel system
- Non-skid mats bow & stern - 6 drink holders
- 4 stainless steel pull-up cleats
- Integrated fold-down stainless steel reboarding ladder, angled for
- allowing optional shallow-water anchor
- 4 grab handles (1 at each seat)
- Fire extinguisher, horn & paddle

LIVEWELL SYSTEMS

- Aft 30-gal. (113.56 L) GUARDIAN™ aerated livewell w/divider &
- 500 GPH (1,892.71 LPH) livewell recirculation/pump-out system 500 GPH (1,892.71 LPH) aerator/fill pump
- Rotomolded w/rounded corners

TROLLING MOTOR

- Minn Kota® Maxxum® 24V, 70-lb. (31.75 kg) thrust, 42" (1.07 m) shaft, foot-control trolling motor
- Trolling motor pedal recess

CONSOLE

- NEW modular, aerodynamic console design w/expanded leg clearance & larger fishfinder surface
 Lowrance® HOOK² 5 Combo flush-mounted fishfinder
- Hydraulic steering w/tilt
- Removable acrylic, tinted windscreen
- Ready to accept optional removable port console
- Veethree[®] multifunction instrumentation w/speedometer/fuel gauge, tach/trim gauge, voltmeter gauge & water pressure gauge
- Dash light dimmer
- Water-resistant switch panels
- LED courtesy light - 12V outlet

INTERIOR

- 34-sq.-ft. (3.2-sq.-m) bow deck for casting mobility w/lots of storage
- Bike seat w/pedestal Folding fishing seat w/composite frame
- Z-CORE[™] seating system w/Force Flex suspension & contoured,
- rotomolded frame for driver & passenger seats
- NEW 1" (2.54 cm) lower, driver & passenger flat seat mounting
- Bow port & starboard rod hold-down straps

- · Molded-in drainage channels around bow storage compartments Oversized, lockable bow port & starboard rod lockers w/lift assists for rods up to 8' (2.44 m)
- Oversized lockable bow center storage locker

175 L Pro XS[®] FourStroke (limited availability)

Step to bow deck w/62-gt. (58.67 L) insulated cooler & removable

MOTOR OPTIONS

MERCURY® MOTOR

150 L Pro XS® FourStroke

150 L FourStroke

- trash recentacle
- Partner rod ramp w/rod handle organizer & hold-down strap
- Footrest w/non-skid mat under console(s)
- Designated net storage behind seating
- 2 lift-out, molded aft storage boxes that will each accept seven 3700 tackle trays
- Molded utility rigging compartment for easy access to batteries
- & pumps & easy cleanup Insulated aluminum lids w/welded corners
- 16-oz. (.45 kg) plush, marine-grade cut pile carpet on decks & floor
- Lockable latches

PERFORMANCE

- NITRO® VORTEX TECHNOLOGY™ (NVT™) hull for a smoother, drier
- RAPID PLANING SYSTEM[™] (RPS[™]) for quicker holeshots &
- maximized speed
- Rigging tube for organized wiring & abrasion resistance - Stainless steel propeller

CONSTRUCTION & EXTERIOR

- 100% composite deck core w/superior thermal stability & strengthto-weight ratio
- Deck & hull chemically bonded & mechanically fastened w/stainless steel fasteners every 2" (5.08 cm)
- Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom
- Low-profile gunnels to maximize deck size & for easier casting

ELECTRICAL

- Angled bow panel w/trolling motor receptacle, anchor/light switch, trim switch & capability to flush mount most 12" (30.5 cm) fishfinders
- LED console courtesy light
- Automotive-style labeled fuse panel w/cover
- Interstate[®] cranking battery
- 2 heavy-duty Interstate® trolling batteries
- 2-bank, 8-amp battery charger w/exterior receptacle
- 6-gauge trolling motor wiring w/50-amp circuit breaker Master power switch
- Waterproof Deutsch plugin gauge connectors

- **OPTIONS**

BOW FISHFINDER

 Lowrance[®] HOOK² 5 Combo (flush mounted) Lowrance[®] HOOK² 7 Combo (flush mounted) Lowrance[®] Elite-7 Ti² (flush mounted) Lowrance[®] Elite-7 Ti² (gimbal mounted) Lowrance[®] Elite-7 Ti² (RAM[®] mounted) Lowrance[®] Elite-9 Ti² (flush mounted) - Lowrance[®] Elite-9 Ti² (gimbal mounted) - Lowrance[®] Elite-9 Ti² (RAM[®] mounted) Lowrance[®] Elite-12 Ti² (flush mounted) Lowrance[®] Elite-12 Ti² (gimbal mounted) Lowrance[®] Elite-12 Ti² (RAM[®] mounted) Lowrance® HDS LIVE 7 w/StructureScan® (flush mounted) Lowrance[®] HDS LIVE 7 w/StructureScan[®] (gimbal mounted) Lowrance[®] HDS LIVE 7 w/StructureScan[®] (RAM[®] mounted) Lowrance[®] HDS LIVE 9 w/StructureScan[®] (flush mounted) Lowrance® HDS LIVE 9 w/StructureScan® (gimbal mounted)
 Lowrance® HDS LIVE 9 w/StructureScan® (RAM® mounted) Lowrance® HDS LIVE 12 w/StructureScan® (gimbal mounted) Lowrance® HDS LIVE 12 w/StructureScan® (RAM® mounted) Add LiveSight real-time 3D sonar to Lowrance® fishfinder - Humminbird[®] HELIX[™] 7 SI G3N (flush mounted) - Humminbird[®] HELIX[™] 7 SI G3N (gimbal mounted) - Humminbird[®] HELIX[™] 7 SI G3N (RAM[®] mounted) - Humminbird[®] HELIX[™] 8 SI G3N w/GPS (flush mounted) Humminbird® HELIX™ 8 SI G3N w/GPS (gimbal mounted) - Humminbird[®] HELIX[™] 8 SI G3N w/GPS (RAM[®] mounted) Humminbird[®] HELIX[™] 9 SI G3N w/GPS (gimbal mounted) - Humminbird® HELIX™ 9 SI G3N w/GPS (RAM® mounted) - Humminbird[®] HELIX[™] 10 SI G3N w/GPS (gimbal mounted) Humminbird[®] HELIX[™] 10 SI G3N w/GPS (RAM[®] mounted) Humminbird[®] HELIX[™] 12 SI G3N w/GPS (gimbal mounted) Humminbird® HELIX™ 12 SI G3N w/GPS (ŘAM® mounted) - Humminbird[®] SOLIX[™] 10 SI G2 (flush mounted) Humminbird[®] SOLIX[™] 10 SI G2 (gimbal mounted) Humminbird[®] SOLIX[™] 10 SI G2 (RAM[®] mounted) - Humminbird[®] SOLIX[™] 12 SI G2 (gimbal mounted) Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted) Garmin[®] ECHOMAP[™] 93sy chartplotter (flush mounted) Garmin[®] ECHOMAP[™] 93sv chartplotter (gimbal mounted) Garmin[®] ECHOMAP[™] 93sv chartplotter (RAM[®] mounted) Garmin[®] GPSMAP[®] 7607 chartplotter (flush mounted) Garmin[®] GPSMAP[®] 7607 chartplotter (idstrinduited)
 Garmin[®] GPSMAP[®] 7607 chartplotter (gimbal mounted)
 Garmin[®] GPSMAP[®] 7607 chartplotter (RAM[®] mounted) Garmin® GPSMAP® 7608 chartplotter (flush mounted) Garmin® GPSMAP® 7608 chartplotter (gimbal mounted) Garmin® GPSMAP® 7608 chartplotter (RAM® mounted) Garmin® GPSMAP® 7610 chartplotter (flush mounted) Garmin[®] GPSMAP[®] 7610 chartplotter (gimbal mounted) Garmin[®] GPSMAP[®] 7610 chartplotter (RAM[®] mounted) Garmin® GPSMAP® 7612 chartplotter (flush mounted) Garmin[®] GPSMAP[®] 7612 chartplotter (gimbal mounted) Garmin® GPSMAP® 7612 chartplotter (RAM® mounted) Add Panoptix[™] real-time 3D sonar to Garmin[®] chartplotter **CONSOLE FISHFINDER EXCHANGE** Lowrance[®] HOOK² 7 Combo (flush mounted) Lowrance[®] HOOK² 7 Combo (uninstalled) Lowrance® Elite-7 Ti² (flush mounted) Lowrance[®] Elite-7 Ti² (RAM[®] mounted) Lowrance[®] Elite-7 Ti² (uninstalled) Lowrance® Elite-9 Ti² (flush mounted) Lowrance® Elite-9 Ti² (RAM® mounted) Lowrance[®] Elite-9 Ti² (uninstalled) - Lowrance[®] Elite-12 Ti² (flush mounted) - Lowrance[®] Elite-12 Ti² (RAM[®] mounted) - Lowrance[®] Elite-12 Ti² (uninstalled) Lowrance® HDS LIVE 7 w/StructureScan® (flush mounted) Lowrance® HDS LIVE 7 w/StructureScan® (RAM® mounted) Lowrance[®] HDS LIVE 7 w/StructureScan[®] (uninstalled) Lowrance® HDS LIVE 9 w/StructureScan® (flush mounted) - Lowrance[®] HDS LIVE 9 w/StructureScan[®] (RAM[®] mounted) Lowrance[®] HDS LIVE 9 w/StructureScan[®] (uninstalled) Lowrance[®] HDS LIVE 12 w/StructureScan[®] (gimbal mounted) Lowrance® HDS LIVE 12 w/StructureScan® (RAM® mounted) Lowrance® HDS LIVE 12 w/StructureScan® (uninstalled) Humminbird[®] HELIX[™] 7 SI G3N (flush mounted) - Humminbird[®] HELIX[™] 7 SI G3N (RAM[®] mounted) - Humminbird[®] HELIX[™] 7 SI G3N (uninstalled) Humminbird[®] HELIX[™] 8 SI G3N w/GPS (flush mounted) - Humminbird[®] HELIX[™] 8 SI G3N w/GPS (RAM[®] mounted) Humminbird[®] HELIX[™] 8 SI G3N wGPS (uninstalled) - Humminbird® HELIX™ 9 SI G3N w/GPS (flush mounted) Humminbird[®] HELIX[™] 9 SI G3N w/GPS (RAM[®] mounted)

- Humminbird[®] HELIX[™] 9 SI G3N wGPS (uninstalled)

- Humminbird[®] HELIX[™] 10 SI G3N w/GPS (flush mounted)

Boat may be shown w/optional equipment. Motors, specs & features subject to change w/out notice.

TRAILER

- Water/abrasion-resistant connectors

- Custom-fit, single-axle NITRO® trailer powder-coated w/GALVASHIELD® Impact corrosion & chip protection for improved durability
- 7-pin connector
- 14" (35.56 cm) chrome wheels w/radial tires
- No Touch Vortex hub lubrication system w/6-year, 100,000-mile
- (1,609.34 km) limited warranty
- All-welded rectangular GALVASHIELD® frame Space-saving swing-away tongue to reduce storage length
- Fold-away tongue jack
- Heavy-duty winch w/nylon strap & bow safety strap Outboard motor support to reduce hull & transom stress while
- Carpeted bunks & fender boards to protect hull Submersible LED lights
- Safety cables

ZIBPRD

- (w/Pro, some standard features or options may not be available) - Bow Humminbird® HELIX™7 DI G3N gimbal-mounted fishfinder w/MEGA Down Imaging, CHIRP Digital Sonar & GPS Console Humminbing, CHIRP Zi G3N flush-mounted fishfinder w/MEGA Down Imaging, CHIRP Digital Sonar & GPS Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot[®] Link™
- Factory-applied keel protector
- Bow tool/drink holder
- 3-bank 30-amp battery charger
 - Retractable transom trailer tie downs

- - - 3-way Ethernet communication between fishfinders & trolling motor

BATTERY CHARGER EXCHANGE

 Dual Pro[®] international battery charge 2-bank, 20-amp battery charger

- 3-bank, 30-amp battery charger
- Stealth 1, 20-amp battery charger w/out gauge
- Stealth 1, 20-amp battery charger w/gauge

CUSHIONS & SEATING

- 2 bike seats (exchange)
- 2 jump seats (exchange)
- Center seat Center seat storage
- Hydraulic pedestal (exchange)

ACCESSORIES

- **NEW** additional cleat at driver seat for quick tie down 2 oxygen generators Bow tool/drink holder
- HydroWave® electronic fish attractor
- Keel protector (Black or White)
- Livewell control valve
- · Loc-R-Bar® w/alarm (dealer installation not included) Port under deck storage drawer
- Snap-in sandwich trav

PERFORMANCE & STEERING

- Hot Foot[™] & trim lever on wheel - Dual trim lever on wheel (must order hydraulic jack plate)
- TROLLING MOTOR
- Minn Kota® Fortrex® 24V, 80-Ib. (36.29 kg) thrust, 45″ (1.14 m) shaft trolling motor w/Universal Sonar 2
- Minn Kota® Fortrex® 24V, 80-lb. (36.29 kg) thrust, 52″ (1.32 m) shaft trolling motor w/Universal Sonar 2
- Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®
- Minn Kota® Ultrex® 24V, 80-lb. (36.29 kg) thrust, 45″ (1.14 m) shaft
- trolling motor w/Universal Sonar 2 & i-Pilot®* Link™
- MotorGuide[®] X5 24V, 80-lb. (36.29 kg) thrust, 45" (1.14 m) shaft trolling motor

FUNCTIONAL

- Anti-fatigue mat
- Carpet embroider
- TACKLE MANAGÉMENT SYSTEM[™] w/center box dividers
- Rod organizer SmartCraft® gauges
- Removable port console & hardware (factory installed)
- 6" (15.24 cm) R&R Design jack plate
- 6" (15.24 cm) Bob's Action hydraulic jack plate
- Minn Kota® 8' (2.44 m) Talon shallow-water anchor—Black (dealer installed
- 2 Minn Kota® 8' (2.44 m) Talon shallow-water anchors—Black (dealer installed)
- Minn Kota® 10' (3.05 m) Talon shallow-water anchor—Black (dealer installed)
- 2 Minn Kota® 10' (3.05 m) Talon shallow-water anchors—Black (dealer installed)
- Minn Kota® 12' (3.66 m) Talon shallow-water anchor—Silver (dealer installed)
- 2 Minn Kota® 12' (3.66 m) Talon shallow-water anchors—Silver (dealer installed) Power-Pole® Blade 8' (2.44 m) shallow-water anchor (dealer

- installed
- 2 Power-Pole® Blade 8' (2.44 m) shallow-water anchors (dealer installed)
- Power-Pole® Blade 10' (3.05 m) shallow-water anchor (dealer installed)
- 2 Power-Pole® Blade 10' (3.05 m) shallow-water anchors (dealer installed)

COVERS

- Mooring cover for side or dual consoles-Charcoal

TRAILER

- Retractable trailer tie downs
- Fiberglass fenders for tandem-axle trailer
- Single-axle trailer upgrade w/1 brake
- Tandem-axle trailer upgrade w/2 brakes
- Tandem-axle trailer upgrade w/2 brakes, 14" (35.56 cm) tire/wheel upgrade & spare tire
- Single-axle spare tire
- 14" (35.56 cm) single-axle custom wheels w/spare tire
- 14" (35.56 cm) tandem-axle custom wheels w/spare tire
- 18" (45.72 cm) custom silver machined aluminum wheel upgrade
- & Hercules RAPTIS R-T5 spare tire (must order fiberglass fenders) 18" (45.72 cm) custom matte Black aluminum alloy wheel upgrade & Hercules RAPTIS R-T5 spare tire (must order fiberglass fenders)



SEE A FULL LIST OF FEATURES & OPTIONS ONLINE



Visit NITRO.COM to view more photos, see a complete list of motors, options, color combinations & features.

HULL LENGTH	BEAM	TRANSOM HEIGHT	мах. нр
17'4" (5.28 m)	7'6'' (2.29 m)	20.5" (52.07 cm)	115
MAX. PERSON CAPACITY	FUEL CAPACITY 24 gal. (90.85 l)	MAX. WEIGHT CAPACITY	storage
3/460 Ibs. (208.65 kg)		1,100 IbS. (498.95 kg)	20' 9"

SPECIFICATIONS

Bottom width	6' (1.83 m)
Depth inside	16.25" (41.28 cm)
Deadrise	16 degrees
Draft	15" (38.1 cm)
Average weight	1,450 lbs. (657.71 kg)
Average package weight	2,650 lbs. (1,202.02 kg)
Package width	7' 11.5" (2.43 m)

115 ELPT Pro XS® FourStroke

115 ELPT Pro XS® FourStroke CT

MERCURY® MOTOR

MOTOR OPTIONS

LENGTH

(6.32 m)





HULL LENGTH 19'5" (5.92 m)	BEAM 7'9'' (2.36 m)	TI 2
MAX. PERSON CAPACITY 5/750 Ibs. (340.19 kg)	FUEL CAPACITY 26 gal. (98.42 l)	M 1
SPECIFICATIONS		N
Bottom width	6' 3" (1.91 m)	Μ
Depth inside	24" (60.96 cm)	15
Deadrise	16 degrees	15
Draft	15" (38.10 cm)	20
Average weight	1,675 lbs. (759.77 kg)	
Average package weight	3,236 lbs. (1,467.83 kg)	
Package width	8' 3" (2.51 m)	

STANDARD FEATURES

COMFORT, CONVENIENCE & PEACE OF MIND NMMA[®] certified - Flotation meets or exceeds NMMA® & U.S.C.G. requirements EPA-compliant fuel system Removable tournament-style ski pylon Port & starboard swim platforms w/integrated boarding ladder 10 stainless steel drink holders 4 stainless steel pull-up cleats Cockpit grab handles - Fire extinguisher, horn & paddle LIVEWELL SYSTEMS - Aft 16-gal. (60.57 L) rotomolded & aerated livewell w/timer, pumpout system & rounded corners 500 GPH (1,892.71 LPH) aerator/fill pump - 750 GPH (2,839.06 LPH) recirculator/pump-out pump Insulated aluminum lids w/welded corners CONSOLE Lowrance® HOOK² 5 Combo flush-mounted fishfinder Radiused walk-thru, tempered-glass windshield Custom-molded port & starboard consoles Port console w/storage tray & insulated cooler - AM/FM Bluetooth®-capable stereo w/USB & MP3 ports Veethree[®] multifunction instrumentation gauges - Water-resistant switch panels INTERIOR Z-CORE[™] seating system w/Force Flex suspension & contoured, rotomolded frame for driver & passenger seats Aft bench seating w/2 convertible, removable fishing seats Bow port & starboard bolsters Forward in-floor rod locker w/organizer - Midship in-floor wakeboard/ski storage - 44-gt. (41.64 L) insulated cooler below aft seat Full-width, lockable rod/ski storage in aft deck - 2 aft storage compartments w/drop-in boxes Insulated aluminum lids w/welded corners 16-oz. (.45 kg) marine-grade cut-pile carpet w/edging Lockable latches

PERFORMANCE

 16° variable deadrise hull Stainless steel propeller

CONSTRUCTION & EXTERIOR

100% composite deck core w/superior stability & strength

STANDARD FEATURES

COMFORT, CONVENIENCE & PEACE OF MIND

- NMMA[®] certified
- Flotation meets or exceeds NMMA® & U.S.C.G. requirements
- EPA-compliant fuel system
- Non-skid mats bow & stern
- 2 drink holders
- 4 stainless steel, angled cleats flushed w/gunnels Integrated fold-down stainless steel reboarding ladder, angled for
- allowing optional shallow-water anchor
- 2 grab handles (1 at passenger, 1 at transom) - Fire extinguisher, horn & paddle

LIVEWELL SYSTEMS

- Aft 23-gal. (87.06 L) GUARDIAN™ aerated livewell w/divider & timer
- 500 GPH (1,892.71 LPH) livewell recirculation/pump-out system
- 500 GPH (1,892.71 LPH) aerator/fill pump Rotomolded w/rounded corners

TROLLING MOTOR

Minn Kota® Edge® 12V, 55-Ib. (24.95 kg) , 45" (1.14 m) trolling motor - Trolling motor pedal recess

CONSOLE

- Custom-molded modular console w/2-tone gelcoat
- Lowrance[®] HOOK² 4x flush-mounted fishfinder
- Single cable, no feedback rotary steering w/tilt
- Removable acrylic, tinted windscreen Ready to accept optional removable port console
- Veethree® multifunction instrumentation w/speedometer/fuel
- gauge, tach/trim gauge, voltmeter gauge & water pressure gauge Dash light dimmer, LED courtesy light, 12V outlet
- Room to flush-mount optional, exchanged 9" (22.86 cm) fishfinder

INTERIOR

- 32-sq.-ft. (3.0-sq.-m) bow deck for casting mobility w/lots of storage
- Bike seat w/pedestal
- Folding fishing seat w/composite frame
- Driver & passenger bucket seats w/molded-in storage below Bow port & starboard rod hold-down straps
- Molded-in drainage channels around bow storage compartments
- Oversized, lockable bow port & starboard 7' (2.13 m) rod lockers Oversized lockable bow center storage locker w/lift assist & organizer for 4 rods up to 7' 6" (2.29 m)
- Step to bow deck w/42-gt. (39.75 L) insulated cooler
- Partner rod ramp w/rod handle organizer & hold-down strap Footrest w/non-skid mat under console(s)
- Step to aft deck w/polymer lid

- 2 lift-out, molded aft boxes each accept seven 3700 tackle trays Molded utility rigging compartment for access to batteries & pumps Insulated aluminum lids w/welded corners
- 16-oz. (.45 kg) plush, marine-grade cut pile carpet on decks & floor Lockable latches

PERFORMANCE

- NITRO[®] VORTEX TECHNOLOGY[™] (NVT[™]) hull for a smoother, drier ride
- RAPID PLANING SYSTEM[™] (RPS[™]) for quicker holeshots & max speed
- Rigging tube for organized wiring & abrasion resistance Stainless steel propeller

CONSTRUCTION & EXTERIOR

- 100% composite deck core w/superior stability & strength
- Deck & hull bonded & fastened w/stainless fasteners every 2" (5.08 cm)
- Gelcoated stringer/liner system Foam-filled hull for optimal buovancy & safety
- Full-width fiberglass-encapsulated composite transom
- Low-profile gunnels to maximize deck size & for easier casting

ELECTRICAL

- Bow panel w/trolling motor receptacle, anchor/light switch, trim switch & capability to flush mount 9" (22.86 cm) fishfinder
- LED console courtesy light
- Automotive-style labeled fuse panel w/cover
- Interstate[®] cranking battery Heavy-duty Interstate® trolling battery
- 2-bank, 8-amp battery charger w/exterior receptacle
- 6-gauge trolling motor wiring w/50-amp circuit breaker
- Waterproof Deutsch plugin gauge connectors
- Water/abrasion-resistant connectors

TRAILER

- Custom-fit, single-axle NITRO® trailer powder-coated w/GALVASHIELD® Impact corrosion & chip protection
- 7-pin connector
- 13" (33.02 cm) chrome wheels w/radial tires & Super Lube hubs Spare tire carrier (spare tire available at additional cost)
- All-welded rectangular GALVASHIELD® frame Space-saving swing-away tongue & fold-away tongue jack
- Heavy-duty winch w/nylon strap & bow safety strap
- Outboard motor support to reduce hull & transom stress Carpeted bunks & fender boards to protect hull
- Submersible LED lights
- Boat may be shown w/optional equipment. Motors, specs & features subject to change w/out notice.

BOW FISHFINDER

OPTIONS

- Lowrance[®] HOOK² 4x (flush mounted)
- Lowrance® HOOK² 5 Combo (flush mounted) Lowrance® HOOK² 7 Combo (flush mounted)
- Lowrance® Elite-7 Ti² (flush, gimbal, or RAM® mounted)
- Humminbird[®] HELIX[™] 7 SI G3N (flush, gimbal, or RAM[®] mounted)

CONSOLE FISHFINDER EXCHANGE

- Lowrance[®] HOOK² 5 Combo (flush mounted or uninstalled)
 Lowrance[®] HOOK² 7 Combo (flush mounted or uninstalled)
- Lowrance[®] Elite-7 Ti² (flush, RAM[®], or uninstalled) - Humminbird[®] HELIX[™] 7 SI G3N (flush, RAM[®], or uninstalled)

- Loc-R-Bar® w/alarm (dealer installation not included)

- Removable port console & hardware (factory installed)

- Mooring cover for side or dual consoles-Charcoal

- MotorGuide® X3 24V, 70-lb. (31.75 kg) thrust, 45" (1.14 m) shaft

13" (33.02 cm) single-axle custom aluminum wheels w/spare tire

BATTERY CHARGER EXCHANGE

 Dual Pro[®] international battery charge - 2-bank, 20-amp battery charger

CUSHIONS & SEATING

- 2 bike seats (exchange) or 2 jump seats (exchange)

PERFORMANCE & STEERING

- Center seat
- Hydraulic pedestal (exchange)

ACCESSORIES

2 oxygen generators

- Tilt hydraulic steering

trolling motor *

FUNCTIONAL

COVERS

TRAILER

TROLLING MOTOR

Retractable trailer tie downs

Single-axle spare tire

Single-axle trailer upgrade w/1 brake

Automatic bilge pump Keel protector (Black or White)

Visit NITRO.COM to view more photos, see a complete list of motors, options, color combinations & features.

FRANSOM HEIGHT

22" (55.88 cm)

MAX, HP 200

21' (6.40 m)

STORAGE LENGTH

MAX. WEIGHT CAPACITY **.700 lbs.** (771.11 kg)

MOTOR OPTIONS

MERCURY® MOTOR

50 L FourStroke

50 L Pro XS® FourStroke

200 L Pro XS® FourStroke

- Deck & hull chemically bonded & mechanically fastened w/stainless steel fasteners
- Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety Full-width fiberglass-encapsulated composite transom

ELECTRICAL

- Port & starboard cockpit courtesy lighting
- Interstate® starting battery
- Interstate[®] trolling battery
- 6-gauge trolling motor wiring w/50-amp circuit breaker Master power switch
- Automotive-style labeled fuse panel w/cover
- Waterproof Deutsch gauge plugin connectors
- Water/abrasion-resistant connectors

TRAILER

- Custom-fit, single-axle NITRO® trailer powder-coated w/GALVASHIELD® Impact corrosion & chip protection 7-nin connector
- 14" (35.56 cm) chrome wheels w/radial tires
- Spare tire carrier (spare tire optional)
- All-welded rectangular GALVASHIELD® frame
- · Space-saving swing-away tongue & fold-away tongue jack Heavy-duty winch w/nylon strap & bow safety strap
- Outboard motor support to reduce hull & transom stress
- · Carpeted bunks & fender boards to protect hull
- Submersible LED lighting
- Nylon tie-down straps (supplied w/boat package) Safety cables

TROLLING MOTOR

· Minn Kota® PowerDrive™ 12V, 55-lb. (24.95 kg) thrust, 54" (1.37 m) shaft foot-control trolling motor w/Universal Sonar transducer

OPTIONS

BOW FISHFINDER

- Lowrance® HOOK² 5 Combo (flush mounted)
- Lowrance[®] HOOK² 7 Combo (flush mounted) - Lowrance[®] Elite-7 Ti² (flush mounted)
- Lowrance[®] HDS LIVE 7 w/StructureScan[®] (dash StructureScan[®] must be chosen also; flush mounted)
- · Lowrance® HDS LIVE 9 w/StructureScan® (dash StructureScan® must be chosen also: flush mounted)
- Add LiveSight real-time 3D sonar to Lowrance® fishfinder

CONSOLE FISHFINDER EXCHANGE

- Lowrance[®] HOOK² 7 Combo (flush mounted or uninstalled)
- Lowrance[®] Elite-7 Ti² (flush mounted or uninstalled)
- Lowrance® HDS LIVE 7 w/StructureScan® (flush mounted or uninstalled)
- Lowrance® HDS LIVE 9 w/StructureScan® (flush mounted or uninstalled)

BATTERY CHARGER EXCHANGE

- 2-bank, 8-amp battery charger
- 2-bank, 20-amp battery charger
- 3-bank, 30-amp battery charger
- Dual Pro[®] SE international battery charger system

LIGHTING

- Blue accent lighting

CUSHIONS & SEATING

- 1 bike & 1 iump seat
- 2 bike seats
- 2 jump seats
- Bow & aft sundeck cushions

ACCESSORIES

- Mini wakeboard tower
- Bimini top (factory installed)
- 1 standard & 1 automatic bilge pump
- Keel protector (Black or White)

TROLLING MOTOR

- MotorGuide® X3 24V, 70-lb. (31.8 kg) thrust, 45" (1.14 m) shaft trolling motor *

FUNCTIONAL

- Snap-in cockpit carpet
- 6" (15.24 cm) top-adjusting jack plate

COVERS

- Mooring cover to fit w/ or w/out Bimini top-Charcoal

TRAILER

- Retractable trailer tie downs
- Single-axle trailer upgrade w/1 brake
- Single-axle spare tire kit
- Custom single-axle trailer wheel w/spare tire (exchange)



VZT STANDARD FEATURES & OPI Visit NITRO.COM to view more photos, see a complete list of motors, options, color combinations & features.

MOTOR OPTIONS

MERCURY® MOTOR

250 XL Verado® Pro FourStroke

300 XL Verado® Pro FourStroke

350 XL Verado®

400 XL Verado®

HULL LENGTH	BEAM	TRANSOM HEIGHT 28 " (71.12 cm)	мах. нр
21'7'' (6.58 m)	8'4''(2.54 m)		400
MAX. PERSON CAPACITY	FUEL CAPACITY	MAX. WEIGHT CAPACITY	STORAGE LENGTH 24' 7'' (7.49 m)
6/1,200 Ibs. (544.31 kg)	64 gal. (242.27 l)	2,500 Ibs. (1,133.98 kg)	

SPECIFICATIONS

Bottom width	6' 5" (1.96 m)
Depth inside	25" (63.50 cm)
Deadrise	18 degrees
Draft	18" (45.72 cm)
Average weight	2,900 lbs. (1,315.42 kg)
Average package weight	5,500 lbs. (2,494.76 kg)
Package width	8' 6" (2.59 m)

STANDARD FEATURES

COMFORT, CONVENIENCE & PEACE OF MIND

- NMMA[®] certified
- Flotation meets or exceeds NMMA® & U.S.C.G. requirements
- EPA-compliant fuel system Gunnels designed to maximize interior space & fishing room
- 3 stainless steel drink holders - 4 stainless steel pull-up cleats
- Stainless steel bow & stern eyes
- Anti-fatigue matting below bow & cockpit carpet
- Emergency boarding ladder
- Passenger grab handle
- Fire extinguisher & horn

LIVEWELL SYSTEM

- Bow 5.5-gal. (20.82 L) insulated baitwell w/removable bucket Aft 26-gal. (98.42 L) insulated GUARDIAN[™], anti-slosh & rotomolded livewell w/removable divider, bait bucket & rounded corners Two 500 GPH (1,892.71 LPH) aerator/fill pumps w/timers (1 for
- baitwell, 1 for livewell) Two 750 GPH (2,839.06 LPH) recirculator pumps w/timers (1 for baitwell, 1 for livewell)
- Pump-out systems (baitwell & livewell)
- Oxygen generators (baitwell & livewell)
- Livewell lid latching to keep lid closed at speed & in rough conditions
- Insulated aluminum lids w/welded cornerss

TROLLING MOTOR

- Minn Kota® Terrova® 36V, 112-lb. (50.80 kg) thrust, 60" (1.52 m) composite shaft, foot-control trolling motor w/Bluetooth® & Universal Sonar 2
- Trolling motor pedal reces

CONSOLE

- Lowrance[®] Elite-7 Ti² Combo RAM[®]-mounted fishfinder w/GPS **NEW** touchscreen switch panel w/1-touch boat controls including First Fish, Nite Mode, master power, trim, lighting, bilge, livewells
- & more NEW key fob remote w/First Fish, Nite Mode, master power on/ off & trim
- First Fish feature fills & recirculates livewell w/1 touch for stressfree livewell prep

Boat may be shown w/optional equipment. Motors, specs & features subject to change w/out notice.

- Hydraulic steering w/custom tilt wheel
- Heavy-duty molded, tinted windscreens
- Custom-molded port & starboard modular consoles w/2-tone aelcoat scheme
- Översized carpeted, lockable port glovebox

Below-console footrest w/non-skid mat Port & starboard below-console shelves SmartCraft[®] link gauges w/Mercury[®] monitor Side-mounted LED courtesy light Space to mount additional electronics

INTERIOR

- Bike seat w/hvdraulic pedestal Attwood® Centric X folding molded fishing seat w/hydraulic
- nedestal NEW Attwood® Centric X driver & passenger seats
- Stainless steel bow & aft rails (port & starboard)
- Bow port & starboard lockers w/lift assists Bow port cooler w/removable tray
- Bow & aft lockable storage compartments
- 3-level center rod locker for rods up to 8' (2.44 m) w/tapered rod
- tubes to protect rod tips Between-console foldout storage drawer w/two 3600 tackle boxes
- Extra-large integrated port net holder Passenger rod ramp w/rod handle organizer & hold-down strap
- Port & starboard midship insulated storage boxes designed to
- accept tackle trays Midship in-floor storage for batteries
- Starboard tool holder
- 2 lift-out, molded aft storage boxes that will each accept seven
- 3700 tackle trays
- Easy access to rigging & pumps
- Insulated aluminum lids w/welded corners 24-oz. (.68 kg) plush, marine-grade, cut pile carpet on decks & floor
- Room to RAM®-mount additional electronics at bow Stainless steel lockable latches

PERFORMANCE

- Deep V performance hull w/RAPID PLANING SYSTEM[™] (RPS[™])
- transom - 3" (7.62 cm) R&R Design Slidemaster adjustable jack plate (Verado®
- Lifting strakes to maximize overall handling & performance
- Transom designed for Kicker motor application
- Rigging tube Stainless steel propeller

- **CONSTRUCTION & EXTERIOR** 100% composite deck core w/superior thermal stability & strengthto-weight ratio
- Deck & hull chemically bonded & mechanically fastened

- 2
- Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom Hand-laid, heavy-duty performance hull w/reinforced sides

ELECTRICAL

- Stowable navigation lights
- Bow panel w/trolling motor receptacle, navigation light, anchor light & trim switches
- Redundant automatic bilge pump system w/dual 1,600 GPH (6,056.66 LPH) pumps
- Heavy-duty Interstate[®] starting battery
- 3 heavy-duty Interstate® trolling batteries
- 4-bank, 35-amp onboard battery charger w/exterior receptacle
- 6-gauge trolling motor wiring w/50-amp circuit breaker
- Automotive style, labeled fuse panel w/cover
- Manual LED-lighted bow storage compartments
- E-Start emergency jump start system
- Master power switch
- Ventilation fan system in bow storage
- Waterproof Deutsch gauge plugin connectors Water/abrasion-resistant connectors
- Console-mounted 12V outlet

TRAILER

- Custom-fit, tandem-axle NITRO® trailer powder-coated w/GALVASHIELD® Impact corrosion & chip protection for improved durability
- 7-pin connector
- 14" (35.56 cm) custom NITRO® aluminum wheels w/radial tires
- Integrated boarding step w/safety handle for easier boarding/ reboarding at bow while boat is on trailer
- Surge disc brakes on both axles
- All-welded rectangular GALVASHIELD® frame
- Spare tire carrier w/matching spare tire
- Space-saving swing-away tongue to reduce storage length
- 1,600-lb. (725.75 kg) swing-up locking jack w/swivel wheel
- Heavy-duty winch w/non-binding nylon strap & bow safety strap
- Outboard motor support to reduce hull & transom stress while Fiberglass fender design w/integrated back-up lights
- Carpeted bunks & fender boards to protect hull Submersible LED lights
- Safety cables



Factory-applied keel protector

- 2-bank, 20-amp battery charger

3-bank, 30-amp battery charger

- Retractable transom trailer tie downs

- Lowrance® Elite-7 Ti² (RAM® mounted)

- Lowrance[®] Elite-9 Ti² (RAM[®] mounted)

must be chosen also; RAM[®] mounted)

must be chosen also; RAM® mounted)

must be chosen also; RAM[®] mounted)

- Lowrance[®] Elite-12 Ti² (RAM[®] mounted)

(3 total chargers w/Pro)

1 extra trolling battery 1 extra kicker batterv

BOW FISHFINDER

OPTIONS

tiller handle)

- w/Pro, some standard features or options may not be available Bow Humminbird® HELIX™9 DI G3N gimbal-mounted fishfinder
- w/MEGA Down Imaging, CHIRP Digital Sonar & GPS **NEW** console Humminbird[®] HELIX[™] 10 SI G3N flush-mounted fishfinder w/MEGA Down Imaging, CHIRP Digital Sonar & GPS

3-way Ethernet communication between fishfinders & trolling motor

Walk-thru windshield (or optional plexiglass windscreens)

5-bank, 35-amp onboard battery charger w/exterior receptacle

Lowrance[®] HDS LIVE 7 w/StructureScan[®] (dash StructureScan[®]

Lowrance® HDS LIVE 9 w/StructureScan® (dash StructureScan®

Lowrance® HDS LIVE 12 w/StructureScan® (dash StructureScan®

Add LiveSight real-time 3D sonar to Lowrance® fishfinder - Humminbird[®] HELIX[™] 7 SI G3N (gimbal mounted)

- Humminbird[®] HELIX[™] 9 SI G3N w/GPS (gimbal mounted)

Humminbird[®] HELIX[™] 9 SI G3N w/GPS (RAM[®] mounted)

Humminbird[®] HELIX[™] 10 SI G3N w/GPS (gimbal mounted) Humminbird[®] HELIX[™] 10 SI G3N w/GPS (RAM[®] mounted)

- Humminbird[®] HELIX[™] 12 SI G3N w/GPS (gimbal mounted)

- Humminbird® HELIX™ 12 SI G3N w/GPS (RAM® mounted)

Garmin[®] ECHOMAP[™] 93sv chartplotter (RAM[®] mounted)

Garmin® GPSMAP® 7607 chartplotter (RAM® mounted)

Garmin® GPSMAP® 7608 chartplotter (RAM® mounted)

Garmin® GPSMAP® 7610 chartplotter (RAM® mounted)

Garmin[®] GPSMAP[®] 7612 chartplotter (RAM[®] mounted)

Add Panoptix[™] real-time 3D sonar to Garmin[®] chartplotter

Lowrance[®] HDS LIVE 7 w/StructureScan[®] (RAM[®] mounted)

- Lowrance[®] HDS LIVE 9 w/StructureScan[®] (RAM[®] mounted)

- Lowrance® HDS LIVE 12 w/StructureScan® (RAM® mounted)

Lowrance[®] HDS LIVE 7 w/StructureScan[®] (uninstalled)

Lowrance® HDS LIVE 9 w/StructureScan® (uninstalled)

Lowrance® HDS LIVE 12 w/StructureScan® (uninstalled)

Humminbird[®] HELIX[™] 9 SI G3N w/GPS (RAM[®] mounted)

Humminbird® HELIX™ 10 SI G3N w/GPS (RAM® mounted)

- Humminbird[®] HELIX[™] 12 SI G3N w/GPS (RAM[®] mounted)

Garmin[®] ECHOMAP[™] 93sv chartplotter (RAM[®] mounted)

Garmin® GPSMAP® 7607 chartplotter (RAM® mounted)
 Garmin® GPSMAP® 7607 chartplotter (uninstalled)

Garmin® GPSMAP® 7608 chartplotter (RAM® mounted)

Garmin® GPSMAP® 7610 chartplotter (RAM® mounted)

Garmin® GPSMAP® 7612 chartplotter (RAM® mounted)

Garmin[®] GPSMAP[®] 7608 chartplotter (uninstalled)

Garmin® GPSMAP® 7610 chartplotter (uninstalled)

Garmin[®] GPSMAP[®] 7612 chartplotter (uninstalled)

Garmin[®] ECHOMAP[™] 93sv chartplotter (uninstalled)

Humminbird[®] HELIX[™] 7 SI G3N (RAM[®] mounted)

Humminbird[®] HELIX[™] 9 SI G3N wGPS (uninstalled)

- Humminbird[®] HELIX[™] 10 SI G3N w/GPS (uninstalled)

Humminbird[®] HELIX[™] 12 SI G3N w/GPS (uninstalled)

Humminbird[®] SOLIX[™] 10 SI G2 (RAM[®] mounted)

Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted)

Humminbird[®] SOLIX[™] 10 SI G2 (uninstalled)

Humminbird[®] SOLIX[™] 12 SI G2 (uninstalled)

Humminbird[®] HELIX[™] 7 SI G3N (uninstalled)

- Humminbird[®] HELIX[™] 7 SI G3N (RAM[®] mounted)

- Humminbird[®] SOLIX[™] 10 SI G2 (gimbal mounted)

Humminbird[®] SOLIX[™] 10 SI G2 (RAM[®] mounted)

Humminbird[®] SOLIX[™] 12 SI G2 (gimbal mounted)

Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted)

CONSOLE FISHFINDER EXCHANGE

Lowrance[®] Elite-9 Ti² (RAM[®] mounted)

- Lowrance[®] Elite-12 Ti² (RAM[®] mounted)

- Lowrance[®] Elite-9 Ti² (uninstalled)

Lowrance® Elite-12 Ti² (uninstalled)

KICKER® KMC1 Bluetooth®-capable stereo system

NEW Minn Kota® Ulterra[™] 36V, 112-lb. (50.80 kg) thrust, 72" (1.83 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot[®] Link[™] Mercury[®] 9.9 remote ProKicker w/built-in fuel tank (or optional 9.9

2ND CONSOLE FISHFINDER

- Lowrance® Elite-7 Ti² (bracket mounted) Lowrance[®] Elite-9 Ti² (bracket mounted)
- 2nd Console Fishfinder
- Lowrance[®] Elite-12 Ti² (bracket mounted)
- Lowrance® HDS LIVE 7 w/StructureScan® (dash view only; bracket mounted)
- Lowrance[®] HDS LIVE 9 w/StructureScan[®] (dash view only: bracket mounted)
- Lowrance® HDS LIVE 12 w/StructureScan® (dash view only; bracket mounted)
- Humminbird® HELIX™ 7 SI G3N (gimbal mounted)
- Humminbird® HELIX™ 9 SI G3N w/GPS (gimbal mounted)
- Humminbird[®] HELIX[™] 10 SI G3N w/GPS (gimbal mounted)
- Humminbird[®] HELIX[™] 12 SI G3N w/GPS (gimbal mounted)
- Humminbird[®] SOLIX[™] 10 SI G2 (gimbal mounted)
- Humminbird[®] SOLIX[™] 12 SI G2 (gimbal mounted)
- Garmin[®] ECHOMAP[™] 93sv chartplotter (gimbal mounted)
- Garmin® GPSMAP® 7607 chartplotter (gimbal mounted) Garmin® GPSMAP® 7608 chartplotter (gimbal mounted)
- Garmin[®] GPSMAP[®] 7610 chartplotter (gimbal mounted)
- Garmin[®] GPSMAP[®] 7612 chartplotter (gimbal mounted)

ELECTRONICS

- KICKER® KMC1 Bluetooth®-capable stereo system

BATTERY CHARGER EXCHANGE

GEN 2-bank, 10-amp + 3-bank, 10-amp charge

CUSHIONS & SEATING

Smooth Moves seat suspension Fishing chair & pedestal

ACCESSORIES

- NEW remote drain plug
- Bimini top (factory installed) Walk-thru windshield
- Extended, 71" (1.8 m) aft deck rail
- Keel protector (Black or White)
- Thumbscrew rail mount rod holders (set of 2)
- Thumbscrew rail mount rod holders (set of 4) Thumbscrew rail mount rod holders (set of 6)
- Tournament ruler

PERFORMANCE & STEERING

- Bravo One[®] propelle
- Lenco trim tabs
- Trim lever on wheel
- Dual trim lever on wheel (must order hydraulic jack plate)

TROLLING MOTOR

- · Minn Kota® Terrova™ 36V, 112-lb. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/i-Pilot[®] Link[™] & MEGA Down Imaging[™] (does not include connections for Humminbird® fishfinders)*
- Minn Kota® Terrova[™] 36V, 112-Ib. (50.8 kg) thrust, 72" (1.83 m) shaft trolling motor w/i-Pilot
- Minn Kota® Terrova[™] 36V, 112-lb. (50.8 kg) thrust, 72" (1.83 m) shaft trolling motor w/i-Pilot[®] Link[™]
- Minn Kota® Ultrex™ 112-lb. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/i-Pilot[®] Link[™] & MEGA Down Imaging[™] *
- Minn Kota[®] Ultrex[™] 112-lb. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ulterra[™] 36V, 112-lb. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/Universal Sonar 2, i-Pilot® Link™ & MEGA Down Imaging
- Minn Kota® Ulterra™ 36V, 112-lb. (50.8 kg) thrust, 72" (1.83 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ulterra™ 36V, 112-lb. (50.8 kg) thrust, 72" (1.83 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®* Link™
- MotorGuide[®] Xi5 36V, 105-lb, (47.63 kg) thrust, 60" (1.52 m) shaft trolling motor
- MotorGuide® Xi5 36V, 105-lb. (47.63 kg) thrust, 72" (1.83 m) shaft trolling motor

KICKER MOTOR

- Tiller handle rigging kit for starboard mounting of the Mercury® 9.9 ELHPT FourStroke Command Thrust ProKicker or Mercury® 15 ELHPT FourStroke Command Thrust ProKicker[†]
- Factory-installed 4.5-gal. (17.03 L) EPA-compliant fuel tank for Mercury[®] 9.9 or 15 ELHPT ProKicker & rigging bracket for starboard
- mounting[†] Factory-installed fuel tank attachment for Mercury® 9.9 ELPT
- FourStroke Command Thrust ProKicker, remote & rigging bracket for starboard mounting w/Verado® rigging[†]
- Factory-installed fuel tank attachment for Mercury® 15 ELPT
- FourStroke Command Thrust ProKicker, remote & rigging bracket for starboard mounting w/Verado® rigging[†]
- Factory-installed Mercury® 9.9 ELHPT FourStroke Command Thrust ProKicker outboard w/4.5-gal. (17.03 L) EPA-compliant fuel tank & rigging bracket^o

- Factory-installed Mercury® 15 ELHPT FourStroke Command Thrust ProKicker outboard w/4.5-gal. (17.03 L) EPA-compliant fuel tank & rigging bracket
- Factory-installed Mercury® 9.9 ELPT FourStroke Command Thrust ProKicker w/fuel tank attachment, remote & rigging bracket w/Verado® rigging^o Factory-installed Mercury® 15 ELPT FourStroke Command Thrust
- ProKicker w/fuel tank, remote & rigging bracket w/Verado® rigging⁰

FUNCTIONAL

- 6" (15.24 cm) Bob's Action Extreme hydraulic jack plate

COVERS

- Mooring cover w/dual consoles—Charcoal
- Mooring cover w/dual consoles-Black & White
- Canvas enclosure (must have windshield option; price shown does not include freight & dealer installation)
- Canvas enclosure w/curtain (must have windshield option; price shown does not include freight & dealer installation)

TRAILER

- Retractable trailer tie downs
- 18" (45.72 cm) custom silver machined aluminum wheel upgrade
- & Hercules RAPTIS R-T5 spare tire (must order fiberglass fenders) 18" (45.72 cm) custom matte Black aluminum alloy wheel upgrade
- & Hercules RAPTIS R-T5 spare tire (must order fiberglass fenders)

*Additonal battery required & sold separately

- [†]Motor & battery sold separately
- ⁰Battery sold separately



SEE A FULL LIST OF FEATURES & OPTIONS ONLINE



EXAMPLARD FEATURES & OPTIONS Visit NITRO.COM to view more photos, see a complete list of motors, options, color combinations & features.

HULL LENGTH	BEAM	TRANSOM HEIGHT	MAX. HP
20'2'' (6.16 m)	8'4" (2.56 m)	26 " (66.04 cm)	300
MAX. PERSON CAPACITY	FUEL CAPACITY	MAX. WEIGHT CAPACITY	STORAGE LENGTH 24' 1'' (7.35 m)
6/1,100 Ibs. (498.95 kg)	55 gal. (208.20 l)	2,200 Ibs. (997.90 kg)	

SPECIFICATIONS

Bottom width	6' 5" (1.98 m)
Depth inside	25" (63.5 cm)
Deadrise	18 degrees
Draft	18" (45.72 cm)
Average weight	2,900 lbs. (1,315.42 kg)
Average package weight	5,500 lbs. (2,494.76 kg)
Package width	8' 6" (2.59 m)

STANDARD FEATURES

COMFORT, CONVENIENCE & PEACE OF MIND

- NMMA[®] certified
- Flotation meets or exceeds NMMA® & U.S.C.G. requirements
- EPA-compliant fuel system Gunnels designed to maximize interior space & fishing room
- 3 stainless steel drink holders
- 4 stainless steel pull-up cleats
- Stainless steel bow & stern eyes
- Anti-fatigue matting below bow & cockpit carpet
- Fold-down 4-step stainless steel reboarding ladder
- Passenger grab handle
- Fire extinguisher & horn

LIVEWELL SYSTEM

- Bow 10-gal. (37.85 L) insulated baitwell w/removable bucket Aft 26-gal. (98.42 L) insulated GUARDIAN[™], anti-slosh & rotomolded livewell w/removable divider, bait bucket & rounded corners Two 500 GPH (1,892.71 LPH) aerator/fill pumps w/timers (1 for
- baitwell, 1 for livewell) Two 750 GPH (2,839.06 LPH) recirculator pumps w/timers (1 for baitwell, 1 for livewell)
- Pump-out systems (baitwell & livewell)
- Oxygen generators (baitwell & livewell)
- Livewell lid latching to keep lid closed at speed & in rough conditions - Insulated aluminum lids w/welded corners

TROLLING MOTOR

- Minn Kota® Terrova® 36V, 112-lb. (50.80 kg) thrust, 60" (1.52 m) composite shaft, foot-control trolling motor w/Bluetooth® & Universal Sonar 2
- Trolling motor pedal recess

CONSOLE

- Lowrance[®] Elite-7 Ti² Combo RAM[®]-mounted fishfinder w/GPS **NEW** touchscreen switch panel w/1-touch boat controls including First Fish, Nite Mode, master power, trim, lighting, bilge, livewells & more
- **NEW** key fob remote w/First Fish, Nite Mode, master power on/ off & trim
- First Fish feature fills & recirculates livewell w/1 touch for stressfree livewell prep
- Hydraulic steering w/custom tilt wheel
- Heavy-duty molded, tinted windscreens
- Custom-molded port & starboard modular consoles w/finished
- Oversized carpeted, lockable port glovebox w/dual access

Boat may be shown w/optional equipment. Motors, specs & features subject to change w/out notice.

Below-console footrest w/storage Port & starboard below-console shelves SmartCraft[®] link gauges w/Mercury[®] monitor Side-mounted LED courtesy light Space to mount additional electronics

MOTOR OPTIONS

225 XL Pro XS® FourStroke w/DTS

250 XL Pro XS® FourStroke w/DTS

300 XL Pro XS® FourStroke w/DTS

MERCURY® MOTOR

INTERIOR

- Bike seat w/hvdraulic pedestal
- Attwood[®] Centric X folding molded fishing seat w/hydraulic
- nedestal
- Attwood® Centric X driver & passenger seats Stainless steel bow & aft rails (port & starboard)
- Bow port & starboard lockers w/lift assists
- Bow port cooler w/removable tray
- Bow & aft lockable storage compartments
- 3-level center rod locker for rods up to 8' (2.44 m) w/tapered rod
- tubes to protect rod tips Between-console foldout storage drawer w/two 3600 tackle boxes
- Extra-large integrated port net holder Passenger rod ramp w/rod handle organizer & hold-down strap
- Port & starboard midship insulated storage boxes designed to
- accept tackle trays Midship in-floor storage for batteries
- Starboard tool holder
- 2 lift-out, molded aft storage boxes that will each accept seven 3700 tackle trays
- Easy access to rigging & pumps
- Insulated aluminum lids w/welded corners
- 24-oz. (.68 kg) plush, marine-grade, cut pile carpet on decks & floor Room to RAM®-mount additional electronics at bow Stainless steel lockable latches

PERFORMANCE

- Deep V NVT[™] performance hull w/RAPID PLANING SYSTEM[™] (RPS[™]) transom
- 10" (25.4 cm) R&R Design Slidemaster adjustable jack plate; 8"
- (20.32 cm) w/225HP motor
- Transom designed for Kicker motor application
- Rigging tube Stainless steel propeller

CONSTRUCTION & EXTERIOR

- 100% composite deck core w/superior thermal stability & strengthto-weight ratio
- Deck & hull chemically bonded & mechanically fastened Gelcoated stringer/liner system

- 2
- Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom
- Hand-laid, heavy-duty performance hull w/reinforced sides

ELECTRICAL

- Bow navigation lights integrated into gunnels
- Bow panel w/trolling motor receptacle, navigation light, anchor light & trim switches
- Redundant automatic bilge pump system w/dual 1,600 GPH
- (6,056.66 LPH) pumps Heavy-duty Interstate® starting battery
- 3 heavy-duty Interstate® trolling batteries
- 4-bank, 35-amp onboard battery charger w/exterior receptacle
- 6-gauge trolling motor wiring w/50-amp circuit breaker
- Automotive style, labeled fuse panel w/cover - Manual LED-lighted bow storage compartments
- E-Start emergency jump start system
- Master power switch
- Ventilation fan system in bow storage Waterproof Deutsch gauge plugin connectors
- Water/abrasion-resistant connectors
- Console-mounted 12V outlet

TRAILER

- Custom-fit, tandem-axle NITRO® trailer powder-coated w/GALVASHIELD® Impact corrosion & chip protection for improved durability
- 7-pin connector
- 14" (35.56 cm) custom NITRO® aluminum wheels w/radial tires Integrated boarding step w/safety handle for easier boarding/
- reboarding at bow while boat is on trailer
- Surge disc brakes on both axles
- All-welded rectangular GALVASHIELD® frame
- Spare tire carrier w/matching spare tire
- Space-saving swing-away tongue to reduce storage length
- 1,500-lb. (680.39 kg) swing-up locking jack w/swivel wheel Heavy-duty winch w/non-binding nylon strap & bow safety strap Outboard motor support to reduce hull & transom stress while
- towing
- Carpeted bunks & fender boards to protect hull Submersible LED lights
- Safety cables



(or optional 9.9 tiller handle)

Factory-applied keel protector

- 2-bank, 20-amp battery charger

- 3-bank, 30-amp battery charger

- Retractable transom trailer tie downs

- Lowrance® Elite-7 Ti² (RAM® mounted)

Lowrance[®] Elite-9 Ti² (RAM[®] mounted)

must be chosen also; RAM® mounted)

must be chosen also; RAM® mounted)

must be chosen also: RAM® mounted)

- Lowrance[®] Elite-12 Ti² (RAM[®] mounted)

1 extra trolling battery

1 extra kicker battery

BOW FISHFINDER

OPTIONS

- (w/Pro, some standard features or options may not be available) - Bow Humminbird[®] HELIX[™] 9 DI G3N RAM[®]-mounted fishfinder
- w/MEGA Down Imaging, CHIRP Digital Sonar & GPS Console Humminbird[®] HELIX[™] 10 SI G3N RAM[®]-mounted fishfinder

3-way Ethernet communication between fishfinders & trolling motor

w/MEGA Down Imaging, CHIRP Digital Sonar & GPS Minn Kota® Ulterra[™] 36V, 112-lb. (50.80 kg) thrust, 72" (1.83 m) shaft

Walk-thru windshield (or optional plexiglass windscreens)

Lowrance[®] HDS LIVE 7 w/StructureScan[®] (dash StructureScan[®]

Lowrance® HDS LIVE 9 w/StructureScan® (dash StructureScan®

Lowrance[®] HDS LIVE 12 w/StructureScan[®] (dash StructureScan[®]

- Add LiveSight real-time 3D sonar to Lowrance® fishfinder

- Humminbird® HELIX™ 9 SI G3N w/GPS (gimbal mounted)

- Humminbird[®] HELIX[™] 9 SI G3N w/GPS (RAM[®] mounted)

Humminbird[®] HELIX[™] 10 SI G3N w/GPS (gimbal mounted)

Humminbird[®] HELIX[™] 10 SI G3N w/GPS (RAM[®] mounted)

Humminbird[®] HELIX[™] 12 SI G3N w/GPS (gimbal mounted)

- Humminbird[®] HELIX[™] 12 SI G3N w/GPS (RAM[®] mounted)

Garmin[®] ECHOMAP[™] 93sv chartplotter (RAM[®] mounted)

Garmin® GPSMAP® 7607 chartplotter (RAM® mounted)

Garmin® GPSMAP® 7608 chartplotter (RAM® mounted)

Garmin[®] GPSMAP[®] 7610 chartplotter (RAM[®] mounted)

Garmin[®] GPSMAP[®] 7612 chartplotter (RAM[®] mounted)

Add Panoptix[™] real-time 3D sonar to Garmin[®] chartplotter

Lowrance[®] HDS LIVE 7 w/StructureScan[®] (RAM[®] mounted)

Lowrance[®] HDS LIVE 9 w/StructureScan[®] (RAM[®] mounted)

Lowrance® HDS LIVE 12 w/StructureScan® (RAM® mounted)

- Lowrance[®] HDS LIVE 7 w/StructureScan[®] (uninstalled)

- Lowrance® HDS LIVE 9 w/StructureScan® (uninstalled)

Lowrance® HDS LIVE 12 w/StructureScan® (uninstalled)

Humminbird® HELIX™ 9 SI G3N w/GPS (RAM® mounted)

- Humminbird[®] HELIX[™] 10 SI G3N w/GPS (RAM[®] mounted)

Humminbird[®] HELIX[™] 12 SI G3N w/GPS (RAM[®] mounted)

Garmin[®] ECHOMAP[™] 93sv chartplotter (RAM[®] mounted)

- Garmin[®] ECHOMAP[™] 93sv chartplotter (uninstalled) - Garmin[®] GPSMAP[®] 7607 chartplotter (RAM[®] mounted)

Garmin® GPSMAP® 7608 chartplotter (RAM® mounted)

Garmin® GPSMAP® 7610 chartplotter (RAM® mounted)

Garmin[®] GPSMAP[®] 7612 chartplotter (RAM[®] mounted)

Garmin[®] GPSMAP[®] 7607 chartplotter (uninstalled)

Garmin[®] GPSMAP[®] 7608 chartplotter (uninstalled)

Garmin[®] GPSMAP[®] 7610 chartplotter (uninstalled)

Garmin[®] GPSMAP[®] 7612 chartplotter (uninstalled)

Humminbird[®] HELIX[™] 7 SI G3N (RAM[®] mounted)

- Humminbird[®] HELIX[™] 9 SI G3N wGPS (uninstalled)

- Humminbird[®] HELIX[™] 10 SI G3N w/GPS (uninstalled)

Humminbird[®] HELIX[™] 12 SI G3N w/GPS (uninstalled)

Humminbird[®] SOLIX[™] 10 SI G2 (RAM[®] mounted)

- Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted)

Humminbird[®] SOLIX[™] 10 SI G2 (uninstalled)

- Humminbird[®] SOLIX[™] 12 SI G2 (uninstalled)

Humminbird[®] HELIX[™] 7 SI G3N (uninstalled)

Humminbird[®] HELIX[™] 7 SI G3N (gimbal mounted)
 Humminbird[®] HELIX[™] 7 SI G3N (RAM[®] mounted)

- Humminbird[®] SOLIX[™] 10 SI G2 (gimbal mounted)

Humminbird[®] SOLIX[™] 10 SI G2 (RAM[®] mounted)

Humminbird[®] SOLIX[™] 12 SI G2 (gimbal mounted)

Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted)

CONSOLE FISHFINDER EXCHANGE

Lowrance[®] Elite-9 Ti² (RAM[®] mounted)

Lowrance® Elite-12 Ti² (RAM® mounted)

Lowrance® Elite-9 Ti² (uninstalled)

- Lowrance[®] Elite-12 Ti² (uninstalled)

trolling motor w/Universal Sonar 2 & i-Pilot[®] Link[™]

Mercury[®] 9.9 remote ProKicker w/built-in fuel tank

- KICKER® KMC1 Bluetooth®-capable stereo system

2ND CONSOLE FISHFINDER

- Lowrance[®] Elite-7 Ti² (bracket mounted)
- Lowrance[®] Elite-9 Ti² (bracket mounted)
- Lowrance[®] Elite-12 Ti² (bracket mounted) Lowrance® HDS LIVE 7 w/StructureScan® (dash view only; bracket
- mounted
- Lowrance[®] HDS LIVE 9 w/StructureScan[®] (dash view only; bracket mounted)
- Lowrance® HDS LIVE 12 w/StructureScan® (dash view only; bracket mounted)
- Humminbird[®] HELIX[™] 7 SI G3N (gimbal mounted)
- Humminbird® HELIX™ 9 SI G3N w/GPS (gimbal mounted)
- Humminbird[®] HELIX[™] 10 SI G3N w/GPS (gimbal mounted)
- Humminbird[®] HELIX[™] 12 SI G3N w/GPS (gimbal mounted) Humminbird[®] SOLIX[™] 10 SI G2 (gimbal mounted)
- Humminbird[®] SOLIX[™] 12 SI G2 (gimbal mounted)
- Garmin[®] ECHOMAP[™] 93sv chartplotter (gimbal mounted)
- Garmin[®] GPSMAP[®] 7607 chartplotter (gimbal mounted)
- Garmin[®] GPSMAP[®] 7608 chartplotter (gimbal mounted)
- Garmin® GPSMAP® 7610 chartplotter (gimbal mounted) Garmin[®] GPSMAP[®] 7612 chartplotter (gimbal mounted)

ELECTRONICS

KICKER® KMC1 Bluetooth®-capable stereo system

BATTERY CHARGER EXCHANGE

- GEN 2-bank, 10-amp + 3-bank, 10-amp charger

CUSHIONS & SEATING

Smooth Moves seat suspension - Fishing chair & pedestal Aft deck fishing chair & pedestal - Cockpit & aft deck fishing chairs & pedestals

ACCESSORIES

• NEW remote drain plug Bimini top (factory installed)

Walk-thru windshield

- Emergency ladder

- Keel protector (Black or White) Ski tow pylon

NEW Cisco accessory-mounting track system Thumbscrew rail mount rod holders (set of 2) Thumbscrew rail mount rod holders (set of 4) Thumbscrew rail mount rod holders (set of 6) - Tournament ruler

PERFORMANCE & STEERING

- Lenco trim tabs

Trim lever on wheel - Dual trim lever on wheel (must order hydraulic jack plate)

TROLLING MOTOR

- Minn Kota® Terrova™ 36V, 112-lb, (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/i-Pilot® Link™ & MEGA Down Imaging™ (does not include connections for Humminbird® fishfinders)*
- Minn Kota® Terrova™ 36V, 112-lb. (50.8 kg) thrust, 72" (1.83 m) shaft trolling motor w/i-Pilot®
- Minn Kota® Terrova™ 36V, 112-lb. (50.8 kg) thrust, 72" (1.83 m) shaft trolling motor w/i-Pilot[®] Link[™]
- Minn Kota® Ultrex™ 112-Ib. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/i-Pilot[®] Link[™] & MEGA Down Imaging[™]
- Minn Kota® Ultrex™ 112-lb. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ulterra™ 36V, 112-lb. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/Universal Sonar 2, i-Pilot® Link™ & MEGA Down Imaging™
- Minn Kota® Ulterra™ 36V, 112-lb. (50.8 kg) thrust, 72" (1.83 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ulterra™ 36V, 112-lb, (50,8 kg) thrust, 72" (1,83 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®* Link™
- MotorGuide® Xi5 36V, 105-Ib. (47.63 kg) thrust, 60" (1.52 m) shaft trolling motor
- MotorGuide® Xi5 36V, 105-lb. (47.63 kg) thrust, 72" (1.83 m) shaft trolling motor

KICKER MOTOR

- Tiller handle rigging kit for starboard mounting of the Mercury® 9.9 ELHPT FourStroke Command Thrust ProKicker or Mercury® 15 ELHPT FourStroke Command Thrust ProKicker[†]
- Factory-installed 4.5-gal. (17.03 L) EPA-compliant fuel tank for Mercury® 9.9 or 15 ELHPT ProKicker & rigging bracket for starboard mounting[†]
- Factory-installed fuel tank attachment for Mercury® 9.9 ELPT FourStroke Command Thrust ProKicker, remote & rigging bracket for starboard mounting w/Verado® rigging⁺
- Factory-installed fuel tank attachment for Mercury® 15 ELPT
- FourStroke Command Thrust ProKicker, remote & rigging bracket for starboard mounting w/Verado® rigging[†]

- Factory-installed Mercury® 9.9 ELHPT FourStroke Command Thrust ProKicker outboard w/4.5-gal. (17.03 L) EPA-compliant fuel tank & rigging bracket
- Factory-installed Mercury® 15 ELHPT FourStroke Command Thrust ProKicker outboard w/4.5-gal. (17.03 L) EPA-compliant fuel tank & rigging bracket
- Factory-installed Mercury[®] 9.9 ELPT FourStroke Command Thrust ProKicker w/fuel tank attachment, remote & rigging bracket w/Verado® rigging⁰
- Factory-installed Mercury® 15 ELPT FourStroke Command Thrust ProKicker w/fuel tank, remote & rigging bracket w/Verado® rigging^o

FUNCTIONAL

- 10" (25.4 cm) Bob's Action Extreme hydraulic jack plate

COVERS

- Mooring cover w/dual consoles—Charcoal
- Mooring cover w/dual consoles—Black & White

TRAILER

- Retractable trailer tie downs
- 18" (45.72 cm) custom silver machined aluminum wheel upgrade
- & Hercules RAPTIS R-T5 spare tire (must order fiberglass fenders)
- 18" (45.72 cm) custom matte Black aluminum alloy wheel upgrade & Hercules RAPTIS R-T5 spare tire (must order fiberglass fenders)

*Additonal battery required & sold separately [†]Motor & battery sold separately ⁰Battery sold separately



SEE A FULL LIST OF FEATURES & OPTIONS ONLINE





BEAM **TRANSOM HEIGHT** MAX. HP HULL LENGTH **8'6''** (2.59 m) **18' 11"** (5.77 m) **25"** (63.50 cm) 225 MAX. WEIGHT CAPACITY STORAGE LENGTH MAX. PERSON CAPACITY **FUEL CAPACITY 6/1,050 lbs.** (476.27 kg) **45 gal.** (170.34 L) **2,000 lbs.** (907.18 kg) **22' 7"** (6.88 m)

SPECIFICATIONS

Bottom width	6' 4" (1.93 m)
Depth inside	25.5" (64.77 cm)
Deadrise	17 degrees
Draft	19.75" (50.17 cm)
Average weight	2,300 lbs. (1,043.26 kg)
Average package weight	4,500 lbs. (2,041.17 kg)
Package width	8' 6" (2.59 m)

STANDARD FEATURES

COMFORT, CONVENIENCE & PEACE OF MIND

- NMMA[®] certified
- Flotation meets or exceeds NMMA® & U.S.C.G. requirements
- EPA-compliant fuel system
- Gunnels designed to maximize interior space & fishing room
- 3 stainless steel drink holders - 4 stainless steel pull-up cleats
- Stainless steel bow & stern eyes
- Fold-down 4-step stainless steel reboarding ladder
- Passenger grab handle
- Fire extinguisher & horn

LIVEWELL SYSTEM

- Bow 5.5-gal. (20.82 L) insulated baitwell w/removable bucket
- Aft 26-gal. (98.42 L) insulated GUARDIAN™, anti-slosh & rotomolded livewell w/removable divider, bait bucket & rounded corners
- Two 500 GPH (1,892.71 LPH) aerator/fill pumps w/timers (1 for baitwell, 1 for livewell)
- Two 750 GPH (2,839.06 LPH) recirculator pumps w/timers (1 for baitwell, 1 for livewell)
- Pump-out systems (baitwell & livewell)
- Livewell lid latching to keep lid closed at speed & in rough conditions Insulated aluminum lids w/welded corners

TROLLING MOTOR

- Minn Kota[®] PowerDrive[™] 24V, 70-Ib. (31.75 kg) thrust, 60" (1.52 m) composite shaft, foot-control trolling motor w/Universal Sonar 2
- Trolling motor pedal recess

CONSOLE

- Lowrance[®] HOOK² 5 Combo flush-mounted fishfinder
- Hvdraulic steering w/custom tilt wheel
- Heavy-duty molded, tinted windscreens
- Custom-molded port & starboard modular consoles w/2-tone
- gelcoat scheme
- Översized carpeted, lockable port glovebox
- Below-console footrest w/non-skid mat
- Port & starboard below-console shelves
- Veethree® multifunction instrumentation gauges w/speedometer/ fuel gauge, tach/trim gauge, voltmeter gauge & water pressure gauge

Boat may be shown w/optional equipment. Motors, specs & features subject to change w/out notice.

- Waterproof, capacitive touch digital keypad
- Side-mounted LED courtesy light
- Space to mount additional electronics

INTERIOR Bike seat w/nedestal

MOTOR OPTIONS

MERCURY® MOTOR

150 XL Pro XS® FourStroke

200 XL FourStroke w/DTS

200 XL Pro XS® FourStroke w/DTS

225 XL Pro XS® FourStroke w/DTS

- Attwood[®] Centric X folding molded fishing seat w/pedestal NEW Attwood® Centric X driver & passenger seats
- Stainless steel bow & aft rails (port & starboard)

Visit NITRO.COM to view more photos, see a complete list of motors, options, color combinations & features,

- Bow port & starboard lockers w/lift assists
- Bow port cooler w/removable tray
- Bow & aft lockable storage compartments
- 3-level center rod locker for rods up to 8' (2.44 m) w/tapered rod
- tubes to protect rod tips
- Step to bow deck w/storage for two 3600 tackle boxes
- Extra-large integrated port net holder
- Midship in-floor storage for batteries Starboard tool holder
- 2 lift-out, molded aft storage boxes that will each accept seven
- 3700 tackle trays
- Easy access to rigging & pumps Insulated aluminum lids w/welded corners
- 24-oz. (.68 kg) plush, marine-grade, cut pile carpet on decks & floor
- Room to RAM®-mount additional electronics at how
- Stainless steel lockable latches

PERFORMANCE

- Deep V performance hull
- 10" (25.4 cm) adjustable jack plate
- Lifting strakes to maximize overall handling & performance
- Transom designed for Kicker motor application Riaaina tube
- Stainless steel propeller

CONSTRUCTION & EXTERIOR

- 100% composite deck core w/superior thermal stability & strengthto-weight ratio
- Deck & hull chemically bonded & mechanically fastened
- Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom
- Hand-laid, heavy-duty performance hull w/reinforced sides

ELECTRICAL

- Bow navigation lights integrated into gunnels
- Bow panel w/trolling motor receptacle, navigation light, anchor light & trim switches
- Heavy-duty Interstate® starting battery
- 2 heavy-duty Interstate® trolling batteries
- 2-bank, 20-amp onboard battery charger w/exterior receptacle



Waterproof Deutsch gauge plugin connectors

Custom-fit, tandem-axle NITRO® trailer powder-coated

w/GALVASHIELD® Impact corrosion & chip protection for improved

14" (35.56 cm) custom NITRO® aluminum wheels w/radial tires

Integrated boarding step w/safety handle for easier boarding/

Heavy-duty winch w/non-binding nylon strap & bow safety strap

Spare tire carrier (spare tire available at additional cost)

Outboard motor support to reduce hull & transom stress

(w/Pro, some standard features or options may not be available)

- Bow Humminbird[®] HELIX[™] 9 DI G3N gimbal-mounted fishfinder

w/MEGA Down Imaging, CHIRP Digital Sonar & GPS NEW console Humminbird® HELIX™ 10 SI G3N flush-mounted

fishfinder w/MEGA Down Imaging, CHIRP Digital Sonar & GPS

shaft trolling motor w/Universal Sonar 2 & i-Pilot® Link™

Walk-thru windshield (or optional plexiglass windscreens)

KICKER[®] KMC1 Bluetooth[®]-capable stereo system

NEW Minn Kota® Ulterra[™] 36V, 112-lb. (50.80 kg) thrust, 72" (1.83 m)

3-way Ethernet communication between fishfinders & trolling motor

Space-saving swing-away tongue & fold-away jack

Water/abrasion-resistant connectors

reboarding at bow while boat is on trailer

All-welded rectangular GALVASHIELD® frame

Steel fenders w/diamond-tread step plates

Submersible LED lights

ZVISPRO

Factory-applied keel protector

4-bank, 40-amp battery charger

Retractable transom trailer tie downs

1 extra trolling battery

Safety cables

Carpeted bunks & fender boards to protect hull

NEW surge disc brakes on both axles

- Console-mounted 12V outlet

TRAILER

durability

7-pin connector

OPTIONS

BOW FISHFINDER

- Lowrance[®] HOOK² 5 Combo (flush mounted)
- Lowrance® HOOK² 7 Combo (flush mounted)
- Lowrance[®] Elite-7 Ti² (RAM[®] mounted) - Lowrance[®] Elite-9 Ti² (RAM[®] mounted)
- Lowrance[®] Elite-12 Ti² (RAM[®] mounted)
- Lowrance[®] HDS LIVE 7 w/StructureScan[®] (dash StructureScan[®]
- must be chosen also: RAM® mounted) Lowrance[®] HDS LIVE 9 w/StructureScan[®] (dash StructureScan[®]
- must be chosen also; RAM® mounted) - Lowrance® HDS LIVE 12 w/StructureScan® (dash StructureScan®
- must be chosen also; RAM[®] mounted)
- Add LiveSight real-time 3D sonar to Lowrance® fishfinder
- Humminbird® HELIX™ 7 SI G3N (gimbal mounted) - Humminbird® HELIX™ 7 SI G3N (RAM® mounted)
- Humminbird[®] HELIX[™] 9 SI G3N w/GPS (gimbal mounted)
- Humminbird "HELIX" 9 SI G3N w/GPS (RAM[®] mounted)
 Humminbird[®] HELIX[™] 10 SI G3N w/GPS (gimbal mounted)
- Humminbird® HELIX™ 10 SI G3N w/GPS (RAM® mounted)
- Humminbird[®] HELIX[™] 12 SI G3N w/GPS (gimbal mounted)
- Humminbird® HELIX™ 12 SI G3N w/GPS (RAM® mounted)
- Humminbird[®] SOLIX[™] 10 SI G2 (gimbal mounted)
- Humminbird[®] SOLIX[™] 10 SI G2 (RAM[®] mounted)
- Humminbird® SOLIX™ 12 SI G2 (gimbal mounted)
 Humminbird® SOLIX™ 12 SI G2 (RAM® mounted)
- Garmin[®] ECHOMAP[™] 93sv chartplotter (RAM[®] mounted)

CONSOLE FISHFINDER EXCHANGE

- Lowrance® HOOK² 7 Combo (bracket mounted)

Lowrance[®] HOOK² 7 Combo (uninstalled)

- Lowrance[®] Elite-7 Ti² (RAM[®] mounted)

Lowrance® Elite-9 Ti² (RAM® mounted)

- Lowrance[®] Elite-12 Ti² (RAM[®] mounted) Lowrance® Elite-12 Ti² (uninstalled)

Lowrance[®] Elite-7 Ti² (uninstalled)

Lowrance[®] Elite-9 Ti² (uninstalled)

Garmin® GPSMAP® 7607 chartplotter (RAM® mounted)
 Garmin® GPSMAP® 7607 chartplotter (RAM® mounted)
 Garmin® GPSMAP® 7608 chartplotter (RAM® mounted)

Garmin® GPSMAP® 7610 chartplotter (RAM® mounted)

Garmin® GPSMAP® 7612 chartplotter (RAM® mounted)

Add Panoptix[™] real-time 3D sonar to Garmin[®] chartplotter

Lowrance[®] HDS LIVE 7 w/StructureScan[®] (RAM[®] mounted)

- Lowrance[®] HDS LIVE 9 w/StructureScan[®] (RAM[®] mounted)

Lowrance® HDS LIVE 12 w/StructureScan® (RAM® mounted)

- Lowrance® HDS LIVE 7 w/StructureScan® (uninstalled)

Lowrance® HDS LIVE 9 w/StructureScan® (uninstalled)

Lowrance® HDS LIVE 12 w/StructureScan® (uninstalled)

- Humminbird[®] HELIX[™] 9 SI G3N w/GPS (RAM[®] mounted)

Humminbird[®] HELIX[™] 10 SI G3N w/GPS (RAM[®] mounted)
 Humminbird[®] HELIX[™] 10 SI G3N w/GPS (uninstalled)

Humminbird[®] HELIX[™] 12 SI G3N w/GPS (RAM[®] mounted)

Garmin[®] ECHOMAP[™] 93sv chartplotter (RAM[®] mounted)

Garmin[®] GPSMAP[®] 7607 chartplotter (Ininstalled)
 Garmin[®] GPSMAP[®] 7607 chartplotter (uninstalled)
 Garmin[®] GPSMAP[®] 7607 chartplotter (uninstalled)

Garmin® GPSMAP® 7608 chartplotter (RAM® mounted)

Garmin[®] GPSMAP[®] 7610 chartplotter (RAM[®] mounted)

Garmin® GPSMAP® 7612 chartplotter (RAM® mounted)

Lowrance[®] HDS LIVE 7 w/StructureScan[®] (dash view only; bracket

Lowrance® HDS LIVE 9 w/StructureScan® (dash view only; bracket

Lowrance® HDS LIVE 12 w/StructureScan® (dash view only; bracket

Garmin[®] GPSMAP[®] 7608 chartplotter (uninstalled)

Garmin[®] GPSMAP[®] 7610 chartplotter (uninstalled)

Garmin® GPSMAP® 7612 chartplotter (uninstalled)

- Lowrance® HOOK² 5 Combo. (bracket mounted)

Lowrance[®] Elite-7 Ti² (bracket mounted)

- Lowrance® Elite-9 Ti² (bracket mounted)

Lowrance[®] Elite-12 Ti² (bracket mounted)

mounted

mounted

mounted)

Lowrance® HOOK² 7 Combo. (bracket mounted)

Humminbird[®] HELIX[™] 7 SI G3N. (gimbal mounted)

- Humminbird® HELIX™ 9 SI G3N w/GPS (gimbal mounted)

Humminbird[®] HELIX[™] 10 SI G3N w/GPS (gimbal mounted)

Humminbird® HELIX™ 12 SI G3N w/GPS (gimbal mounted)

2ND CONSOLE FISHFINDER

Garmin[®] ECHOMAP[™] 93sv chartplotter (uninstalled)

Humminbird[®] HELIX[™] 12 SI G3N w/GPS (uninstalled)

Humminbird[®] SOLIX[™] 10 SI G2 (RAM[®] mounted)

- Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted)

- Humminbird[®] SOLIX[™] 10 SI G2 (uninstalled)

Humminbird[®] SOLIX[™] 12 SI G2 (uninstalled)

Humminbird[®] HELIX[™] 7 SI G3N (RAM[®] mounted)

- Humminbird[®] HELIX[™] 9 SI G3N wGPS (uninstalled)

- Humminbird[®] HELIX[™] 7 SI G3N (uninstalled)

Humminbird[®] SOLIX[™] 10 SI G2. (gimbal mounted) Humminbird[®] SOLIX[™] 12 SI G2. (gimbal mounted) Garmin[®] ECHOMAP[™] 93sv chartplotter (gimbal mounted) Garmin[®] GPSMAP[®] 7607 chartplotter (gimbal mounted) Garmin[®] GPSMAP[®] 7608 chartplotter (gimbal mounted) Garmin® GPSMAP® 7610 chartplotter (gimbal mounted) - Garmin[®] GPSMAP[®] 7612 chartplotter (gimbal mounted)

ELECTRONICS

KICKER® KMC1 Bluetooth®-capable stereo system

BATTERY CHARGER EXCHANGE

GEN 3-bank, 30-amp battery charger - GEN 4-bank, 40-amp battery charger

CUSHIO NS & SEATING

Smooth Moves seat suspension - Fishing chair & pedestal

ACCESSORIES

- NEW remote drain plug
- NEW aft livewell drain valve
- Bimini top (factory installed) Walk-thru windshield
- 2 oxygen generators
- Anti-fatigue mat
- Emergency ladder
- Keel protector (Black or White)
- Ski tow pylon
- Thumbscrew rail mount rod holders (set of 2)
- Thumbscrew rail mount rod holders (set of 4) Thumbscrew rail mount rod holders (set of 6) Tournament ruler

PERFORMANCE & STEERING

- Lenco trim tabs Trim lever on wheel
- Dual trim lever on wheel (must order hydraulic jack plate)

TROLLING MOTOR

- Minn Kota® Terrova™ 24V, 80-lb. (36.29 kg) thrust, 60" (1.52 m) shaft trolling motor w/i-Pilot®
- Minn Kota® Terrova™ 24V, 80-lb, (36,29 kg) thrust, 60" (1,52 m) shaft trolling motor w/Universal Sonar 2, i-Pilot[®] Link[™] & MEGA Down Imaging"
- Minn Kota® Terrova™ 36V, 112-lb. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/i-Pilot® *
- Minn Kota® Terrova[™] 36V, 112-lb. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/i-Pilot[®] Link[™] & MEGA Down Imaging[™] (does not include connections for Humminbird® fishfinders)*
- Minn Kota® Terrova[™] 36V, 112-lb. (50.8 kg) thrust, 72[°] (1.83 m) shaft trolling motor w/i-Pilot[®] *
- Minn Kota® Terrova™ 36V, 112-lb. (50.8 kg) thrust, 72" (1.83 m) shaft trolling motor w/i-Pilot[®] Link[™]*
- Minn Kota® Ultrex™ 112-lb. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/i-Pilot[®] Link[™] & MEGA Down Imaging[™]
- Minn Kota® Ultrex™ 112-lb. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ulterra™ 36V, 112-Ib. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/Universal Sonar 2, i-Pilot® Link™ & MEGA Down Imaging™
- Minn Kota® Ulterra™ 36V, 112-lb. (50.8 kg) thrust, 72" (1.83 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ulterra™ 36V, 112-lb. (50.8 kg) thrust, 72" (1.83 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®* Link™*
- MotorGuide[®] Xi5 24V, 80-lb. (36.29 kg) thrust, 60" (1.52 m) shaft trolling motor
- MotorGuide[®] Xi5 36V, 105-lb. (47.63 kg) thrust, 60" (1.52 m) shaft trolling motor *
- MotorGuide[®] Xi5 36V, 105-Ib. (47.63 kg) thrust, 72" (1.83 m) shaft trolling motor *

KICKER MOTOR

- Tiller handle rigging kit for starboard mounting of the Mercury® 9.9 ELHPT FourStroke Command Thrust ProKicker or Mercury® 15 ELHPT FourStroke Command Thrust ProKicker[†]
- Factory-installed Mercury[®] 9.9 ELHPT FourStroke Command Thrust ProKicker w/rigging bracket
- Factory-installed Mercury[®] 9.9 ELPT FourStroke Command Thrust ProKicker w/fuel tank attachment, remote & rigging bracket^o Factory-installed Mercury® 15 ELHPT FourStroke Command Thrust ProKicker w/rigging bracket[◊]
- Factory-installed Mercury® 15 ELPT FourStroke Command Thrust ProKicker w/fuel tank attachment, remote & rigging bracket

FUNCTIONAL

- SmartCraft[®] gauges
- 6" (15.24 cm) Bob's Action Extreme hydraulic jack plate

COVERS

- Mooring cover w/dual consoles—Charcoal
- Mooring cover w/dual consoles—Black & White
- Canvas enclosure (must have windshield option)
- Canvas enclosure w/curtain (must have windshield option)

TRAILER

- Retractable trailer tie downs
- Spare tire kit

*Additonal battery required & sold separately [†]Motor & battery sold separately ⁰Battery sold separately



SEE A FULL LIST OF **FEATURES & OPTIONS ONLINE**





HULL LENGTH	BEAM	TRANSOM HEIGHT	мах. нр
18'11'' (5.77 m)	8' 6'' (2.59 m)	25" (63.50 cm)	225
MAX. PERSON CAPACITY	FUEL CAPACITY	MAX. WEIGHT CAPACITY	
6/1,050 Ibs. (476.27 kg)	45 gal. (170.34 l)	2,000 Ibs. (907.18 kg)	

SPECIFICATIONS

Bottom width	6' 4" (1.93 m)
Depth inside	25.5" (64.77 cm)
Deadrise	17 degrees
Draft	19.75" (50.17 cm)
Average weight	2,300 lbs. (1,043.26 kg)
Average package weight	4,500 lbs. (2,041.17 kg)
Package width	8' 6" (2.59 m)

STANDARD FEATURES

COMFORT, CONVENIENCE & PEACE OF MIND

NMMA[®] certified

- Flotation meets or exceeds NMMA® & U.S.C.G. requirements EPA-compliant fuel system
- Gunnels designed to maximize interior space & fishing room
- Removable tournament-style ski pylon
- Fold-down 4-step stainless steel reboarding ladder
- 4 stainless steel drink holders
- 4 stainless steel pull-up cleats
- Passenger grab handle
- Stainless steel bow & stern eves

- Fire extinguisher & horn LIVEWELL SYSTEMS

- Bow 10-gal. (37.85 L) GUARDIAN[™] rotomolded & aerated livewell

- w/timer, recirculator, pump-out system & rounded corners Aft 26-gal. (98.42 L) insulated GUARDIAN™, anti-slosh & rotomolded livewell w/removable divider, bait bucket & rounded corners
- Two 500 GPH (1,892.71 LPH) aerator/fill pumps w/timers (1 for
- baitwell, 1 for livewell) Two 750 GPH (2,839.06 LPH) recirculator pumps w/timers (1 for
- baitwell 1 for livewell)
- Pump-out systems (baitwell & livewell)
- Livewell lid latching to keep lid closed at speed & in rough conditions Insulated aluminum lids w/welded corners
- Trolling Motor
- Minn Kota[®] PowerDrive[™] 24V, 70-lb. (31.75 kg) thrust, 60" (1.52 m)
- composite shaft, foot-control trolling motor w/Universal Sonar 2 Quick-release bracket for Minn Kota® or MotorGuide® trolling motor
- Trolling motor pedal recess

CONSOLE

- Lowrance[®] HOOK² 5 Combo flush-mounted fishfinder
- Hydraulic steering w/custom tilt wheel
- Heavy-duty molded, tinted windscreens
- Custom-molded port & starboard modular consoles w/2-tone gelcoat scheme
- Översized carpeted, lockable port glovebox Veethree[®] multifunction instrumentation gauges w/speedometer/
- fuel gauge, tach/trim gauge, voltmeter gauge & water pressure

Boat may be shown w/optional equipment. Motors, specs & features subject to change w/out notice.

- Waterproof, capacitive touch digital keypad
- Below-console footrest w/non-skid mat Port & starboard below-console shelves
- Helm below-console recess

Side-mounted LED courtesy light

MOTOR OPTIONS

MERCURY® MOTOR

150 XL Pro XS® FourStroke

200 XL FourStroke w/DTS

200 XL Pro XS® FourStroke w/DTS

225 XL Pro XS® FourStroke w/DTS

Space to mount additional electronics

INTERIOR

- Bike seat w/pedestal
- **NEW** Attwood[®] Centric X driver & passenger seats - 2 folding jump seats integrated into aft fishing deck w/NEW
- unholstery styling
- Stainless steel bow & aft rails (port & starboard)
- Bow port & starboard lockers w/lift assists
- Bow port cooler w/removable tray Bow & aft lockable storage compartments
- Extra-large integrated port net holder
- Midship in-floor storage for batteries
- Starboard tool holder
- 2 lift-out, molded aft storage boxes that will each accept four 3700 tackle trays
- Easy access to rigging & pumps
- Insulated aluminum lids w/welded corners
- 24-oz. (.68 kg) plush, marine-grade, cut pile carpet on decks & floor Room to RAM®-mount additional electronics at bow Stainless steel lockable latches

PERFORMANCE

- Deep V performance hull
- 10" (25.4 cm) adjustable jack plate
- Lifting strakes to maximize overall handling & performance Transom designed for Kicker motor application
- Rigging tube Stainless steel propeller

- **CONSTRUCTION & EXTERIOR** 100% composite deck core w/superior thermal stability & strengthto-weight ratio
- Deck & hull chemically bonded & mechanically fastened w/stainless steel fasteners
- Gelcoated stringer/liner system
- Foam-filled hull for optimal buoyancy & safety
- Full-width fiberglass-encapsulated composite transom
- Hand-laid, heavy-duty performance hull w/reinforced sides


ELECTRICAL

- Bow panel w/trolling motor receptacle, navigation light, anchor light & trim switches
- Manual LED-lighted bow storage compartments
- Heavy-duty Interstate® starting battery

- 2 heavy-duty Interstate® trolling batteries
- 2-bank, 20-amp onboard battery charger w/exterior receptacle
- 6-gauge trolling motor wiring w/50-amp circuit breaker

w/GALVASHIELD® Impact corrosion & chip protection for improved durability 7-pin connector - 14" (35.56 cm) custom NITRO® aluminum wheels w/radial tires Integrated boarding step w/safety handle for easier boarding/ reboarding at bow while boat is on trailer **NEW** surge disc brakes on both axles All-welded rectangular GALVASHIELD® frame

- Outboard motor support to reduce hull & transom stress while
- towina
- Carpeted bunks & fender boards to protect hull Spare tire carrier (spare tire available at additional cost)
- Submersible LED lights
- Safety cables
- Heavy-duty winch w/non-binding nylon strap & bow safety strap Steel fenders w/diamond-tread step plates



- E-Start emergency jump start system
- Master power switch
- Automotive-style labeled fuse panel w/cover
- Waterproof Deutsch gauge plugin connectors
- Water/abrasion-resistant connectors
- Console-mounted 12V outlet

TRAILER

Custom-fit, tandem-axle NITRO® trailer powder-coated

Space-saving swing-away tongue & fold-away tongue jack

- Garmin[®] GPSMAP[®] 7610 chartplotter (RAM[®] mounted)
- Garmin[®] GPSMAP[®] 7610 chartplotter (uninstalled) Garmin[®] GPSMAP[®] 7612 chartplotter (RAM[®] mounted)
- Garmin[®] GPSMAP[®] 7612 chartplotter (uninstalled)

2ND CONSOLE FISHFINDER

ZVISPRO

Bimini top (factory installed)

Factory-applied keel protector

4-bank, 40-amp battery charger

OPTIONS

BOW FISHFINDER

- Retractable transom trailer tie downs

- Lowrance® HOOK² 5 Combo (flush mounted)

Lowrance[®] HOOK² 7 Combo (flush mounted)

Lowrance[®] Elite-7 Ti² (RAM[®] mounted)

Lowrance[®] Elite-9 Ti² (RAM[®] mounted)

must be chosen also; RAM® mounted)

must be chosen also; RAM® mounted)

must be chosen also: RAM[®] mounted)

- Lowrance[®] Elite-12 Ti² (RAM[®] mounted)

w/Pro, some standard features or options may not be available

w/MEGA Down Imaging, CHIRP Digital Sonar & GPS

w/MEGA Down Imaging, CHIRP Digital Sonar & GPS

shaft trolling motor w/Universal Sonar 2 & i-Pilot® Link™

Walk-thru windshield (or optional plexiglass windscreens)

Lowrance® HDS LIVE 7 w/StructureScan® (dash StructureScan®

Lowrance® HDS LIVE 9 w/StructureScan® (dash StructureScan®

Lowrance[®] HDS LIVE 12 w/StructureScan[®] (dash StructureScan[®]

Add LiveSight real-time 3D sonar to Lowrance® fishfinder

Humminbird[®] HELIX[™] 9 SI G3N w/GPS (RAM[®] mounted)

Humminbird[®] HELIX[™] 10 SI G3N w/GPS (gimbal mounted)

 Humminbird[®] HELIX[™] 10 SI G3N w/GPS (RAM[®] mounted) Humminbird[®] HELIX[™] 12 SI G3N w/GPS (gimbal mounted)

Humminbird® HELIX™ 12 SI G3N w/GPS (RAM® mounted)

Garmin[®] ECHOMAP[™] 93sv chartplotter (RAM[®] mounted)

Garmin[®] GPSMAP[®] 7607 chartplotter (RAM[®] mounted)

Garmin® GPSMAP® 7608 chartplotter (RAM® mounted)

Garmin[®] GPSMAP[®] 7610 chartplotter (RAM[®] mounted)

Garmin® GPSMAP® 7612 chartplotter (RAM® mounted)

Add Panoptix[™] real-time 3D sonar to Garmin[®] chartplotter

Lowrance® HDS LIVE 7 w/StructureScan® (RAM® mounted)

Lowrance[®] HDS LIVE 9 w/StructureScan[®] (RAM[®] mounted)

- Lowrance[®] HDS LIVE 12 w/StructureScan[®] (RAM[®] mounted)

Lowrance[®] HDS LIVE 7 w/StructureScan[®] (uninstalled)

Lowrance® HDS LIVE 9 w/StructureScan® (uninstalled)

Lowrance® HDS LIVE 12 w/StructureScan® (uninstalled)
 Humminbird® HELIX[™] 7 SI G3N (RAM® mounted)

Humminbird[®] HELIX[™] 9 SI G3N w/GPS (RAM[®] mounted)

Humminbird® HELIX™ 10 SI G3N w/GPS (RAM® mounted)

- Humminbird[®] HELIX[™] 12 SI G3N w/GPS (RAM[®] mounted)

Garmin[®] ECHOMAP[™] 93sv chartplotter (RAM[®] mounted)

Garmin[®] ECHOMAP[™] 93sv chartplotter (uninstalled)

Garmin[®] GPSMAP[®] 7607 chartplotter (uninstalled)

Garmin® GPSMAP® 7608 chartplotter (uninstalled)

Garmin® GPSMAP® 7607 chartplotter (RAM® mounted)

Garmin[®] GPSMAP[®] 7608 chartplotter (RAM[®] mounted)

Humminbird[®] HELIX[™] 9 SI G3N wGPS (uninstalled)

- Humminbird[®] HELIX[™] 10 SI G3N w/GPS (uninstalled)

Humminbird[®] HELIX[™] 12 SI G3N w/GPS (uninstalled)

Humminbird[®] SOLIX[™] 10 SI G2 (RAM[®] mounted)

Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted)

Humminbird[®] SOLIX[™] 10 SI G2 (uninstalled)

Humminbird[®] SOLIX[™] 12 SI G2 (uninstalled)

Humminbird[®] HELIX[™] 7 SI G3N (uninstalled)

Humminbird[®] HELIX[™] 7 SI G3N (gimbal mounted)

Humminbird[®] HELIX[™] 7 SI G3N (RAM[®] mounted) Humminbird[®] HELIX[™] 9 SI G3N w/GPS (gimbal mounted)

Humminbird[®] SOLIX[™] 10 SI G2 (gimbal mounted)

Humminbird[®] SOLIX[™] 10 SI G2 (RAM[®] mounted)

Humminbird[®] SOLIX[™] 12 SI G2 (gimbal mounted)

Humminbird[®] SOLIX[™] 12 SI G2 (RAM[®] mounted)

CONSOLE FISHFINDER EXCHANGE

Lowrance[®] HOOK² 7 Combo (bracket mounted)

Lowrance[®] HOOK² 7 Combo (uninstalled)

Lowrance® Elite-7 Ti2 (RAM® mounted)

- Lowrance[®] Elite-9 Ti² (RAM[®] mounted)

Lowrance® Elite-12 Ti² (RAM® mounted)

- Lowrance[®] Elite-7 Ti² (uninstalled)

Lowrance[®] Elite-9 Ti² (uninstalled)

Lowrance[®] Elite-12 Ti² (uninstalled)

KICKER[®] KMC1 Bluetooth[®]-capable stereo system

Bow Humminbird[®] HELIX[™] 9 DI G3N gimbal-mounted fishfinder

Console Humminbird® HELIX™ 10 SI G3N flush-mounted fishfinder

NEW Minn Kota[®] Ulterra[™] 36V, 112-lb. (50.80 kg) thrust, 72" (1.83 m)

3-way Ethernet communication between fishfinders & trolling motor

- Lowrance[®] HOOK² 5 Combo (bracket mounted)
- Lowrance[®] HOOK² 7 Combo (bracket mounted)
- Lowrance[®] Elite-7 Ti² (bracket mounted)
- Lowrance[®] Elite-9 Ti² (bracket mounted) Lowrance® Elite-12 Ti2 (bracket mounted)
- Lowrance® HDS LIVE 7 w/StructureScan® (dash view only; bracket
- mounted - Lowrance® HDS LIVE 9 w/StructureScan® (dash view only; bracket
- mounted) - Lowrance® HDS LIVE 12 w/StructureScan® (dash view only; bracket
- mounted) Humminbird[®] HELIX[™] 7 SI G3N (gimbal mounted)
- Humminbird® HELIX™ 7 SI G3N (ŘAM® mounted)
- Humminbird[®] HELIX[™] 9 SI G3N w/GPS (gimbal mounted)
- Humminbird[®] HELIX[™] 9 SI G3N w/GPS (RAM[®] mounted)
- Humminbird[®] HELIX[™] 10 SI G3N w/GPS (gimbal mounted)
- Humminbird[®] HELIX[™] 10 SI G3N w/GPS (RAM[®] mounted)
- Humminbird® HELIX™ 12 SI G3N w/GPS (gimbal mounted) Humminbird[®] HELIX[™] 12 SI G3N w/GPS (RAM[®] mounted)
- Humminbird[®] SOLIX[™] 10 SI G2 (gimbal mounted)
- Humminbird[®] SOLIX[™] 12 SI G2 (gimbal mounted)
- Garmin[®] ECHOMAP[™] 93sv chartplotter (gimbal mounted) Garmin[®] GPSMAP[®] 7607 chartplotter (gimbal mounted) Garmin[®] GPSMAP[®] 7608 chartplotter (gimbal mounted)
- Garmin[®] GPSMAP[®] 7610 chartplotter (gimbal mounted) - Garmin[®] GPSMAP[®] 7612 chartplotter (gimbal mounted)
- ELECTRONICS
- KICKER® KMC1 Bluetooth®-capable stereo system

BATTERY CHARGER EXCHANGE

 GEN 3-bank, 30-amp battery charger - GEN 4-bank, 40-amp battery charger

CUSHIONS & SEATING

Smooth Moves seat suspension Fishing chair & pedestal Bow & aft sundeck cushions

ACCESSORIES

- **NEW** remote drain plug
- NEW aft livewell drain valve
- · Bimini top (factory installed) · Walk-thru windshield - 2 oxygen generators
- Anti-fatigue mat
- Emergency ladder
- Keel protector (Black or White)
- Port or starboard under deck storage drawer Thumbscrew rail mount rod holders (set of 2)
- Thumbscrew rail mount rod holders (set of 4) Thumbscrew rail mount rod holders (set of 6)
- Tournament ruler

PERFORMANCE & STEERING

- Lenco trim tabs
- Trim lever on wheel
- Dual trim lever on wheel (must order hydraulic jack plate)

TROLLING MOTOR

- Minn Kota® Terrova™ 24V, 80-lb. (36.29 kg) thrust, 60" (1.52 m) shaft trolling motor w/i-Pilot®
- Minn Kota® Terrova™ 24V, 80-lb. (36.29 kg) thrust, 60" (1.52 m) shaft trolling motor w/Universal Sonar 2, i-Pilot® Link™ & MEGA Down Imaging"
- Minn Kota® Terrova™ 36V, 112-lb. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/i-Pilot[®] Link[™] & MEGA Down Imaging[™] (does not include connections for Humminbird® fishfinders)*
- Minn Kota® Terrova™ 36V, 112-Ib. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/i-Pilot® *
- Minn Kota® Terrova™ 36V, 112-lb. (50.8 kg) thrust, 72" (1.83 m) shaft
- trolling motor w/i-Pilot® * Minn Kota® Terrova™ 36V, 112-lb. (50.8 kg) thrust, 72" (1.83 m) shaft trolling motor w/i-Pilot[®] Link[™] *
- Minn Kota® Ulterra™ 36V, 112-lb. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/Universal Sonar 2, i-Pilot[®] Link[™] & MEGA Down
- Imaaina[™] * • Minn Kota® Ulterra™ 36V. 112-lb. (50.8 kg) thrust. 72" (1.83 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota® Ulterra™ 36V, 112-lb. (50.8 kg) thrust, 72" (1.83 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®* Link™*

- Minn Kota® Ultrex™ 112-Ib. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/Universal Sonar 2 & i-Pilot®*
- Minn Kota[®] Ultrex[™] 112-lb. (50.8 kg) thrust, 60" (1.52 m) shaft trolling motor w/i-Pilot[®] Link[™] & MEGA Down Imaging[™]
- MotorGuide® Xi5 24V, 80-lb. (36.29 kg) thrust, 60" (1.52 m) shaft trolling motor
- MotorGuide® Xi5 36V, 105-Ib. (47.63 kg) thrust, 60" (1.52 m) shaft trolling motor *
- MotorGuide[®] Xi5 36V, 105-lb. (47.63 kg) thrust, 72" (1.83 m) shaft trolling motor *

KICKER MOTOR

- Tiller handle rigging kit for starboard mounting of the Mercury® 9.9 ELHPT FourStroke Command Thrust ProKicker or Mercury[®] 15 ELHPT FourStroke Command Thrust ProKicker¹
- Factory-installed Mercury® 9.9 ELHPT FourStroke Command Thrust ProKicker w/rigging bracket^o
- Factory-installed Mercury® 9.9 ELPT FourStroke Command Thrust
- ProKicker w/fuel tank attachment, remote & rigging bracket[¢]
- Factory-installed Mercury® 15 ELHPT FourStroke Command Thrust ProKicker w/rigging bracket^o
- Factory-installed Mercury® 15 ELPT FourStroke Command Thrust ProKicker w/fuel tank attachment, remote & rigging bracket[◊]

FUNCTIONAL

- SmartCraft[®] gauges
 6" (15.24 cm) Bob's Action Extreme hydraulic jack plate

COVERS

- Mooring cover w/dual consoles—Charcoal
- Mooring cover w/dual consoles—Black & White
- Mooring cover w/dual consoles & windshield-Charcoal
- Mooring cover w/dual consoles & windshield—Black & White
- Canvas enclosure (must have windshield option)
- Canvas enclosure w/curtain (must have windshield option)

TRAILER

- Retractable trailer tie downs
- Spare tire kit

*Additonal battery required & sold separately ^tMotor & battery sold separately

⁰Battery sold separately



SEE A FULL LIST OF FEATURES & OPTIONS ONLINE



THE RELENTLESS PURSUIT OF FICTIESS PURSUIT OF FICTIESS PURSUIT OF

At NITRO® Boats, our job is to build precision fishing machines that can make your fishing dreams into reality. We do so knowing that your boat is the most important tool in your angling arsenal. And we do so with the same passion you have—a love of the outdoors, of tradition, of family and of that feisty green fish on the end of your line. Because inside anyone that has ever fought and landed one resides a champion—this is why we design every NITRO boat to help you release the champion within.

We're constantly adding content online like fishing tips, outdoor events, amazing photos, special deals and more – and we invite you to share your memories with us on any of the social media channels below.







COM

2500 E. Kearney | Springfield, MO 65898-5048 U.S.A. NITRO.COM

Photos may show optional or special edition equipment available at an additional cost. Details in pricing, savings, features and promotions may vary by location and are subject to change without notice. Void where prohibited by law. Best efforts are used to ensure the accuracy of our advertising, however, errors may sometimes occur. Applicable tariffs may affect final price. See your local dealer for complete information. F.O.B. Springfield, MO, USA. © 2019 White River Marine Group, LLC 87061

SKU #2804759 UPC #092229504230



Your Authorized NITRO® Boats Dealer

TRE

